

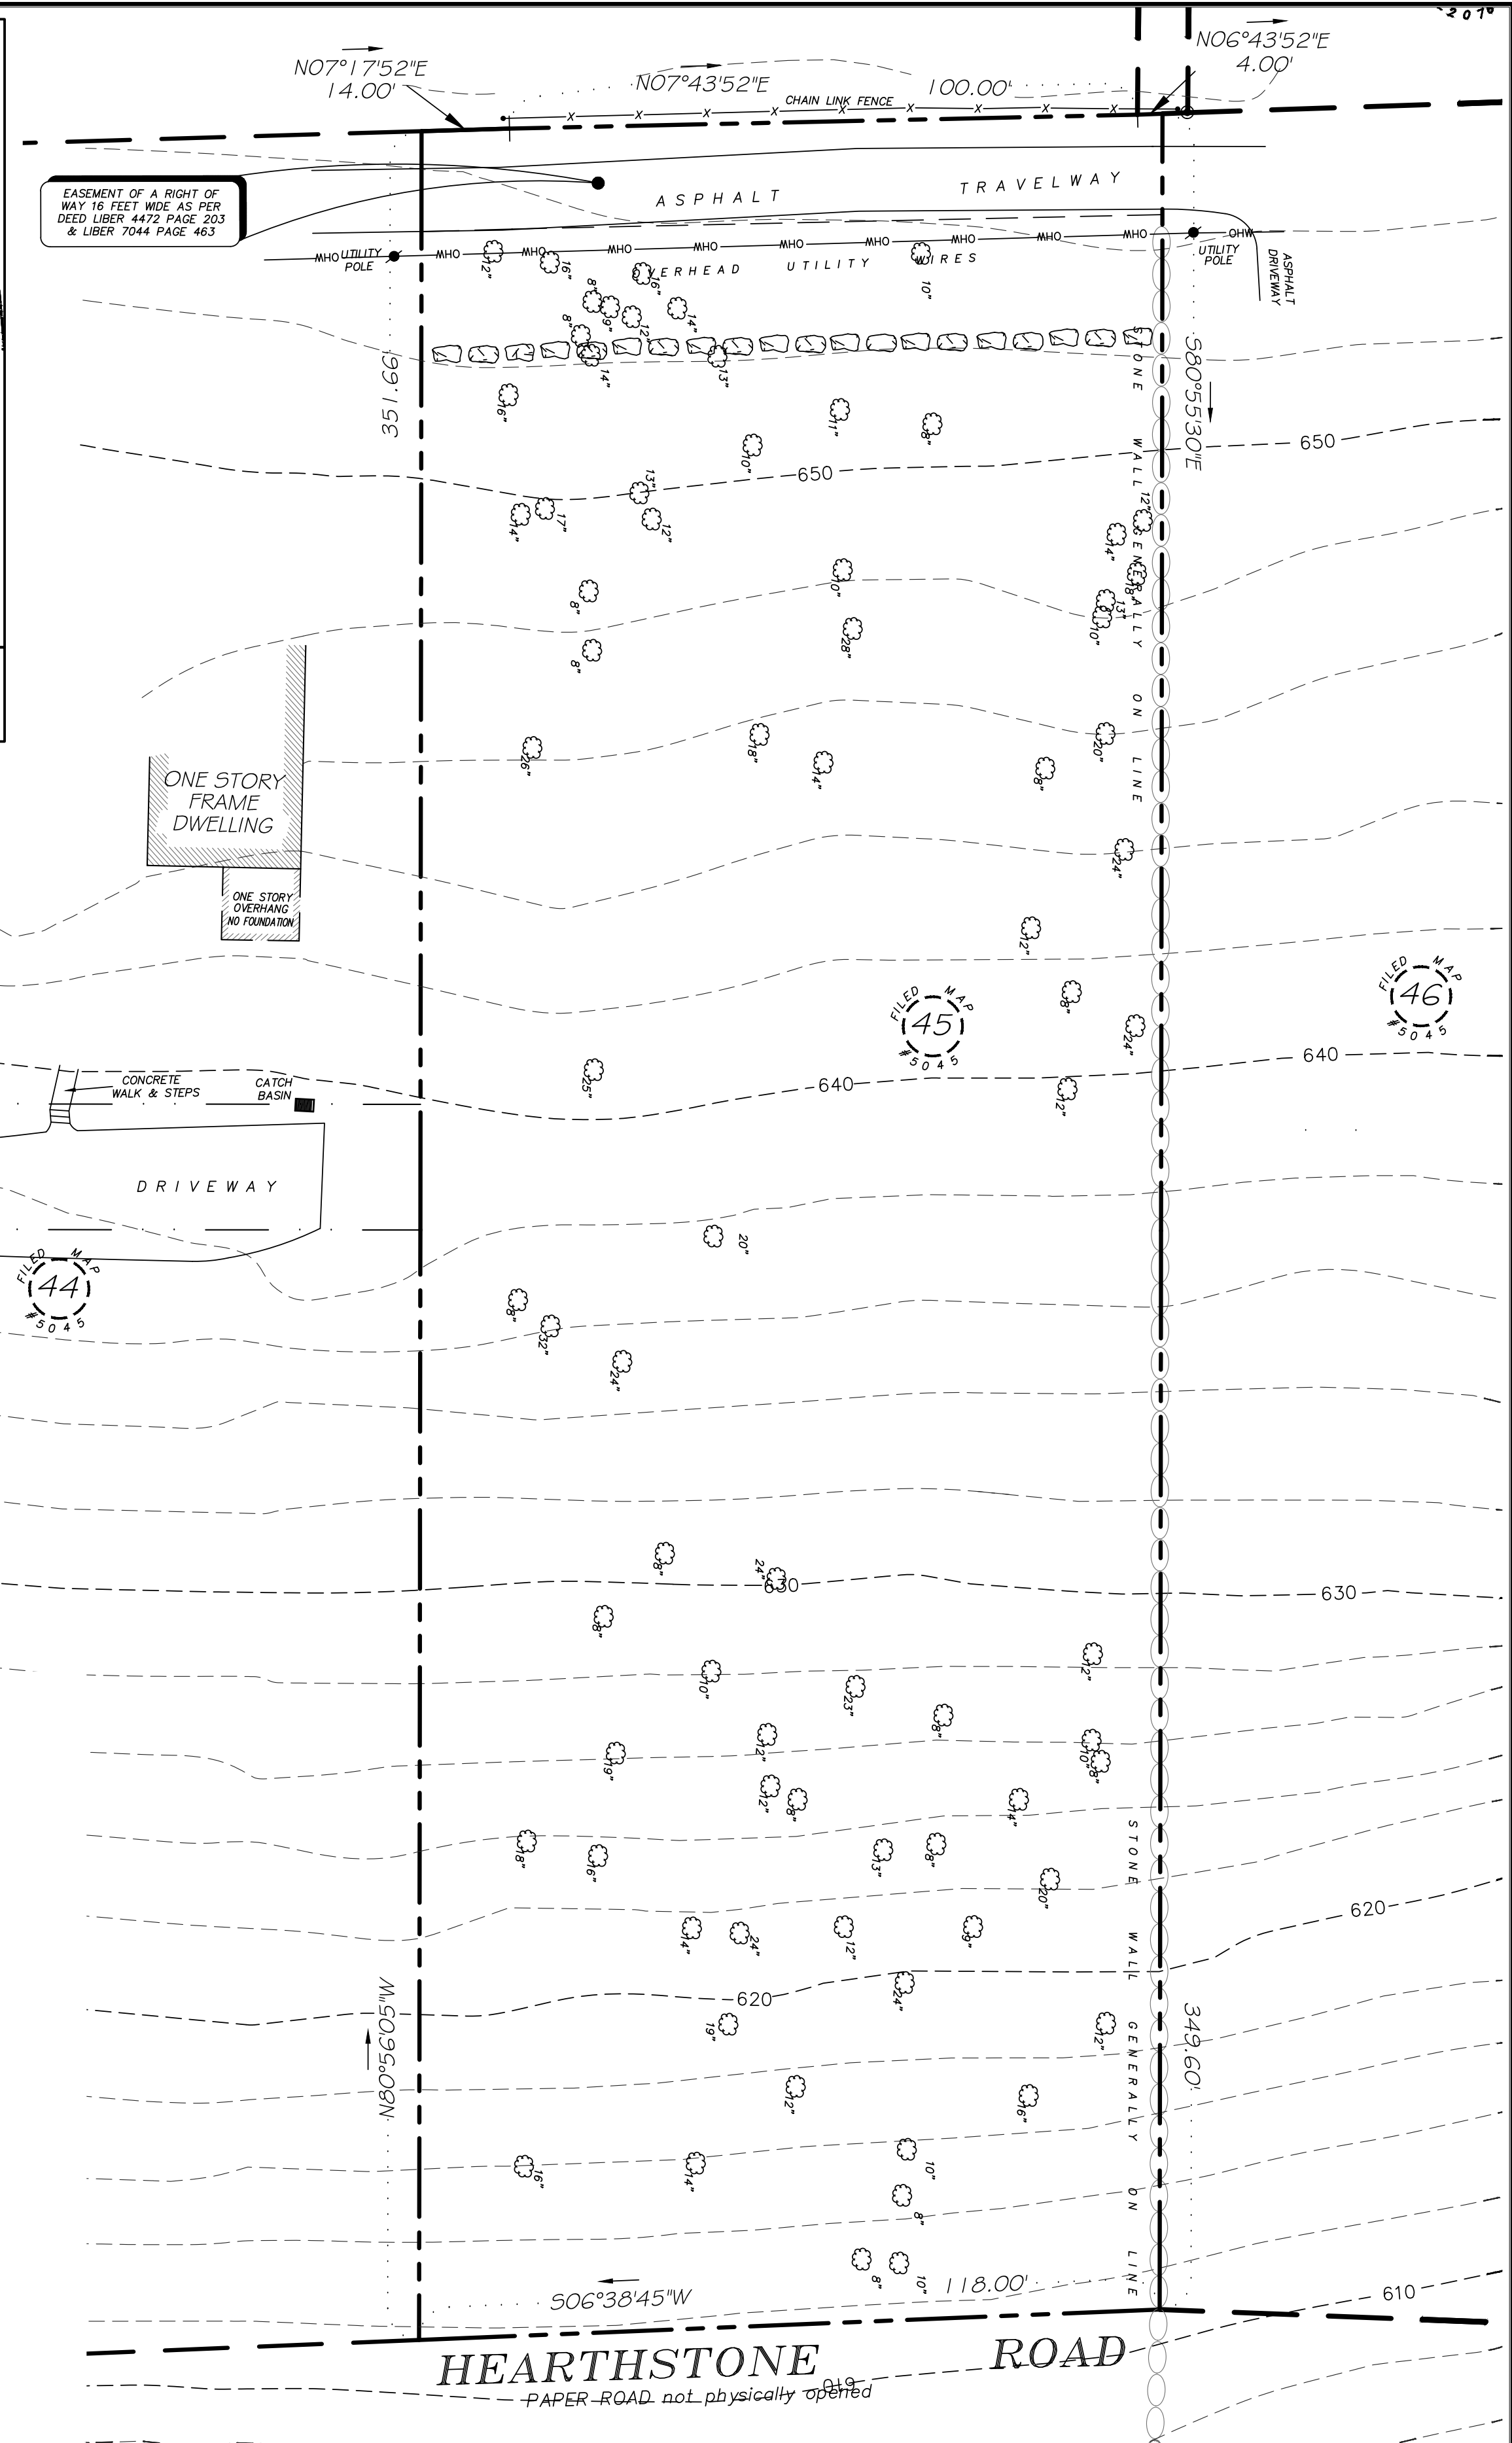
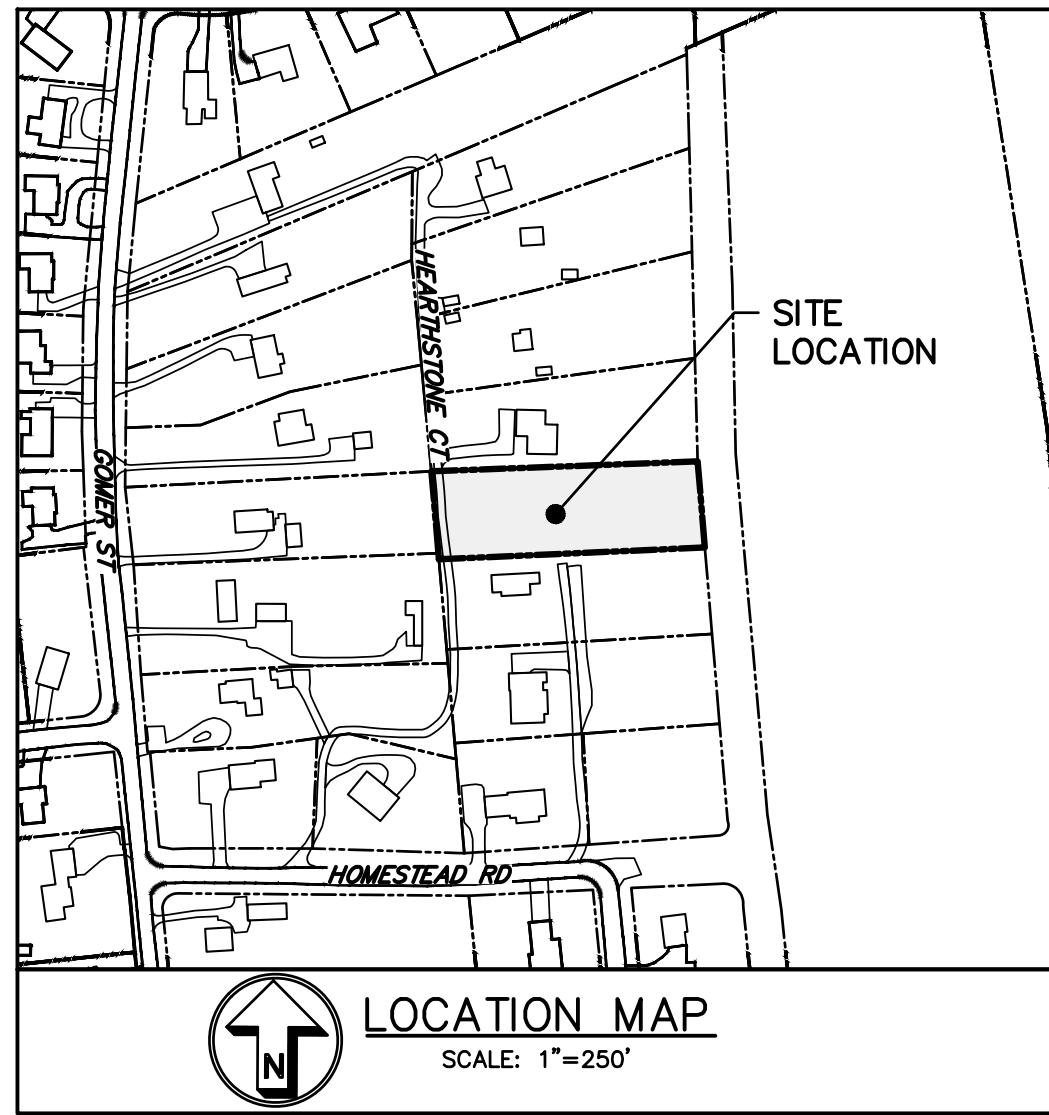


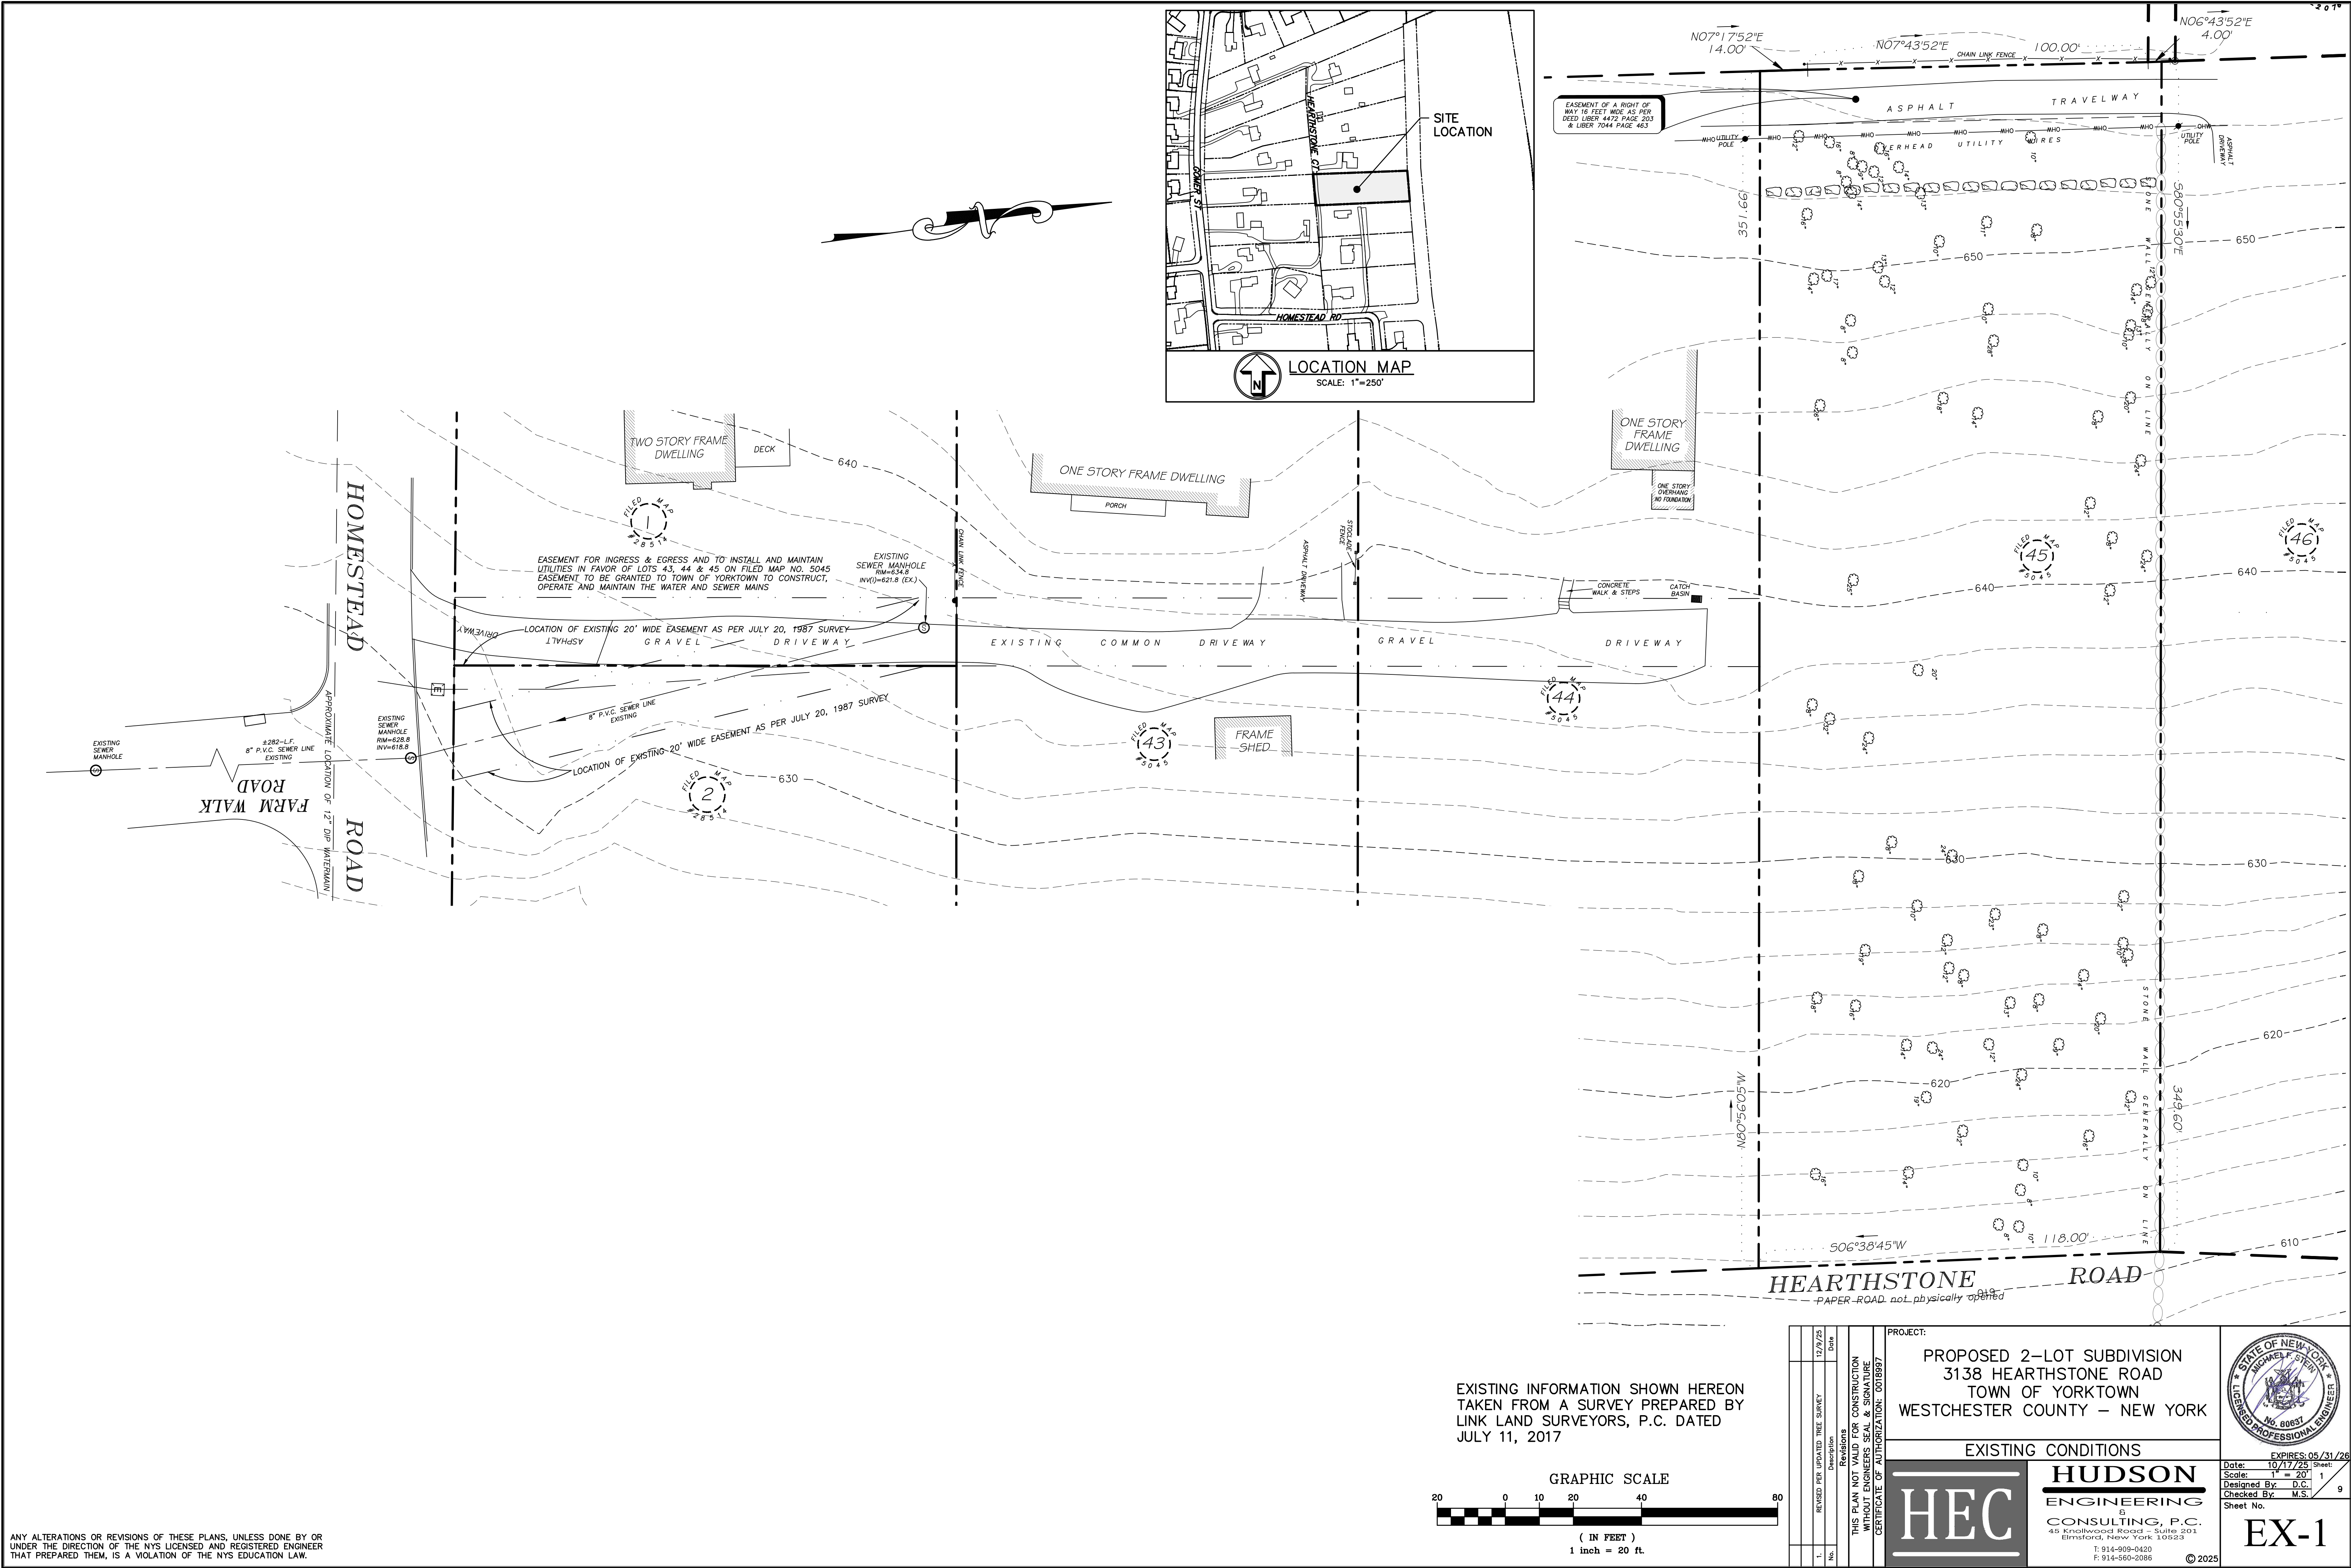


EXISTING INFORMATION SHOWN HEREON
TAKEN FROM A SURVEY PREPARED BY
LINK LAND SURVEYORS, P.C. DATED
JULY 11, 2017

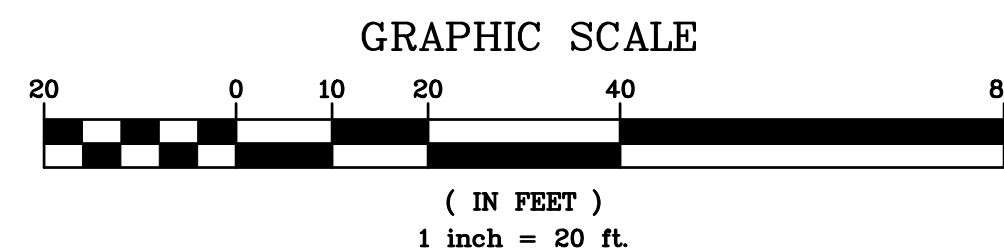


REVISIONS		PROJECT:	
1	REVISED PER UPDATED PREL SURVEY	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK	
2	REVISED PER UPDATED PREL SURVEY	EXISTING CONDITIONS	
THIS PLAN NOT VALID FOR CONSTRUCTION WITHOUT ENGINEER'S SEAL & SIGNATURE CERTIFICATE OF AUTHORIZATION: 0018997		HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086	
DATE: 12/7/25		EXPIRES: 05/31/26	
DESIGNED BY: D.C.		DATE: 10/17/25	
CHECKED BY: M.S.		SHEET: 1	
SHEET NO. 9		SHEET NO. 9	


EX-1

ANY ALTERATIONS OR REVISIONS OF THESE PLANS, UNLESS DONE BY OR
UNDER THE DIRECTION OF THE NYS LICENSED AND REGISTERED ENGINEER
THAT PREPARED THEM, IS A VIOLATION OF THE NYS EDUCATION LAW.

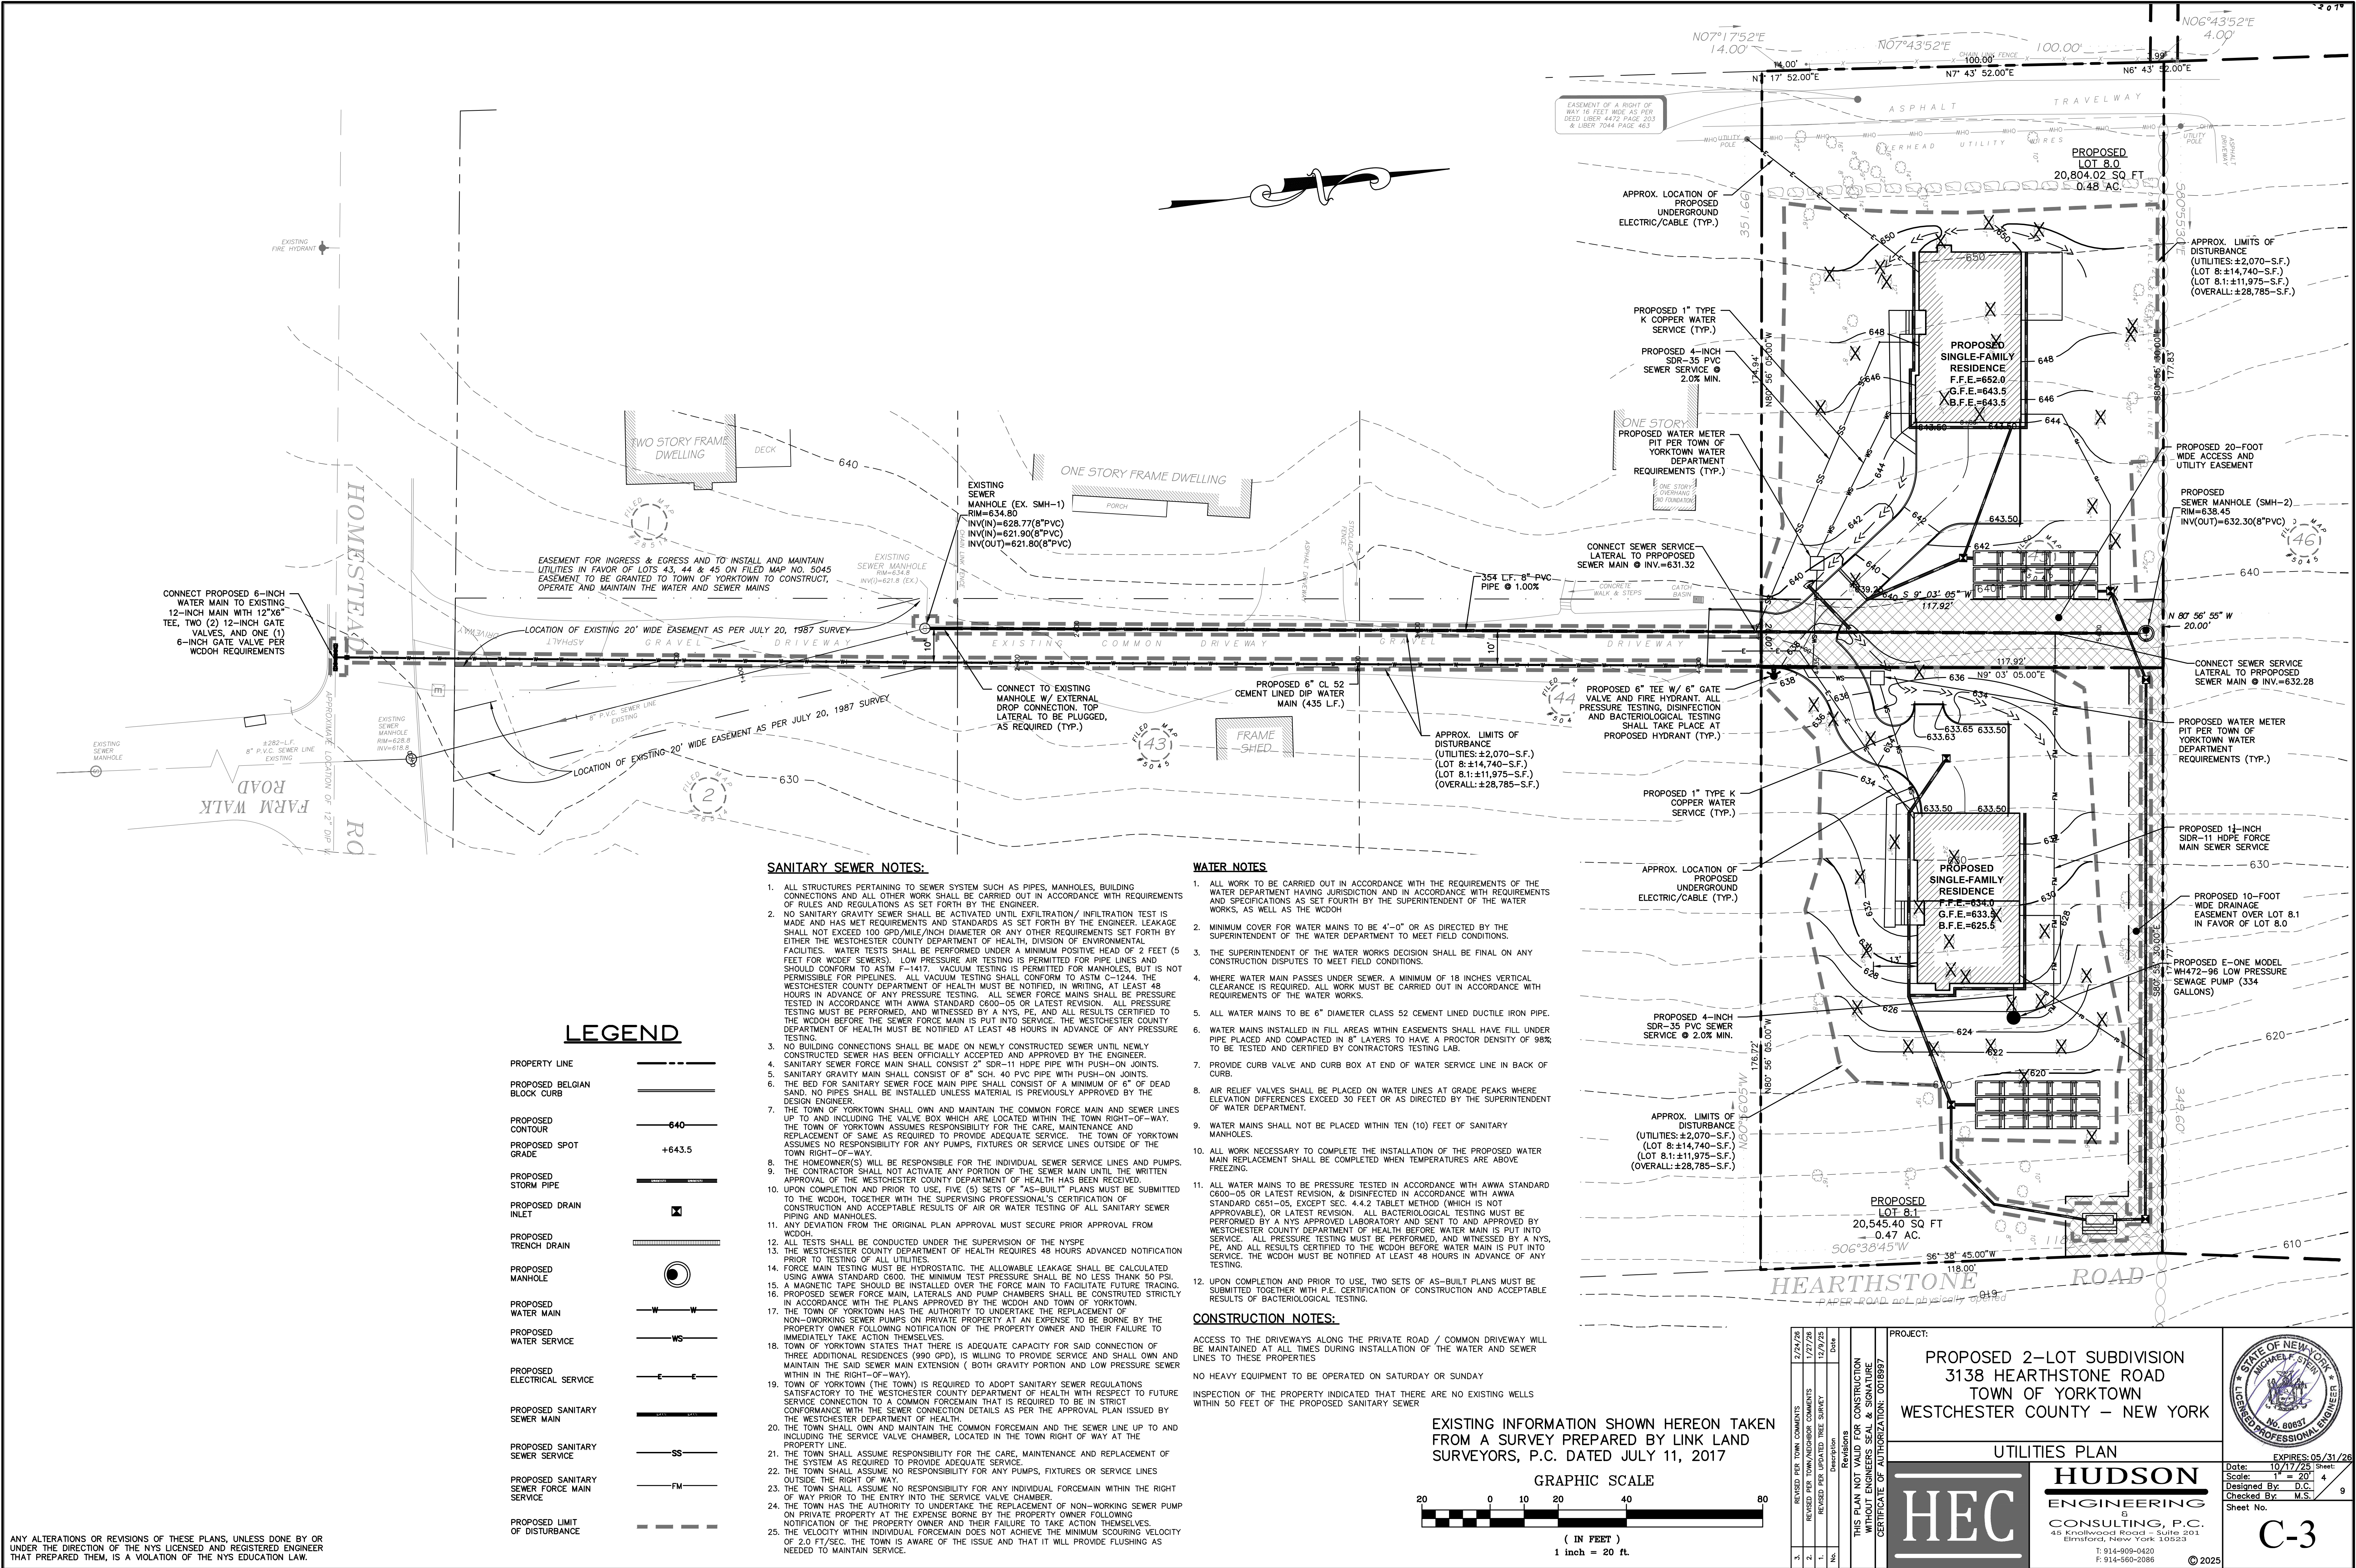


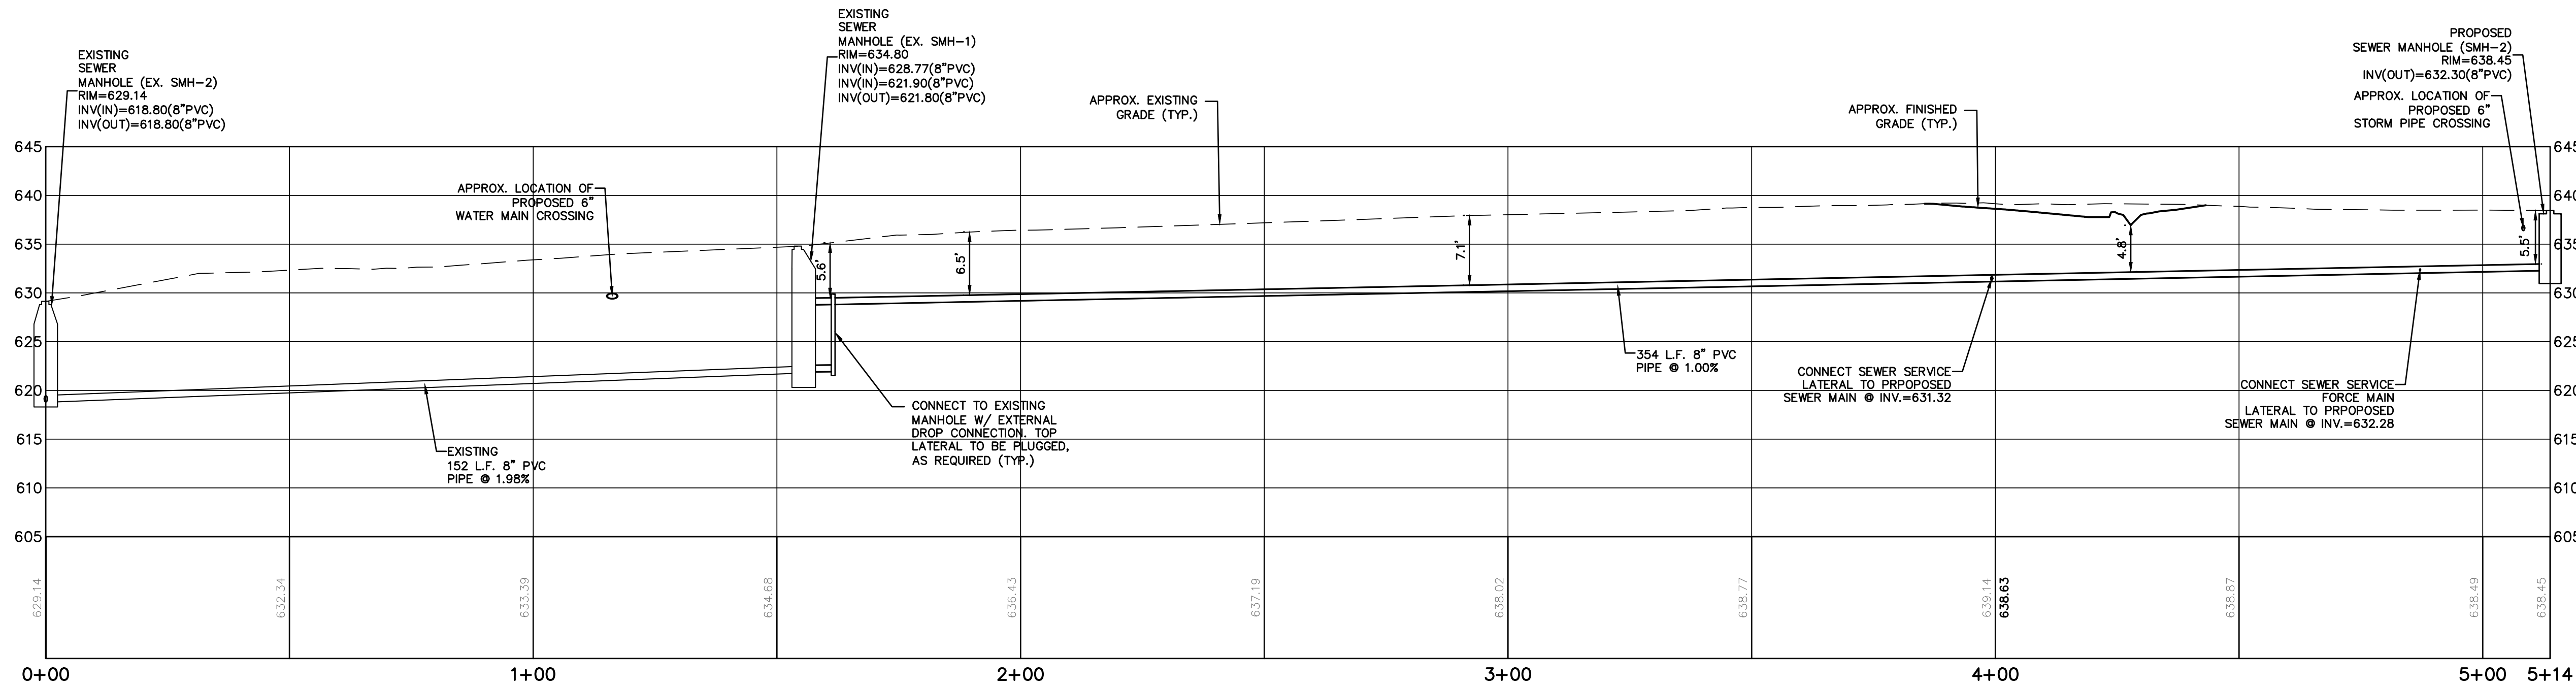


SANITARY SEWER PROFILE
(STA. 0+00 TO STA. 5+14)
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 10'

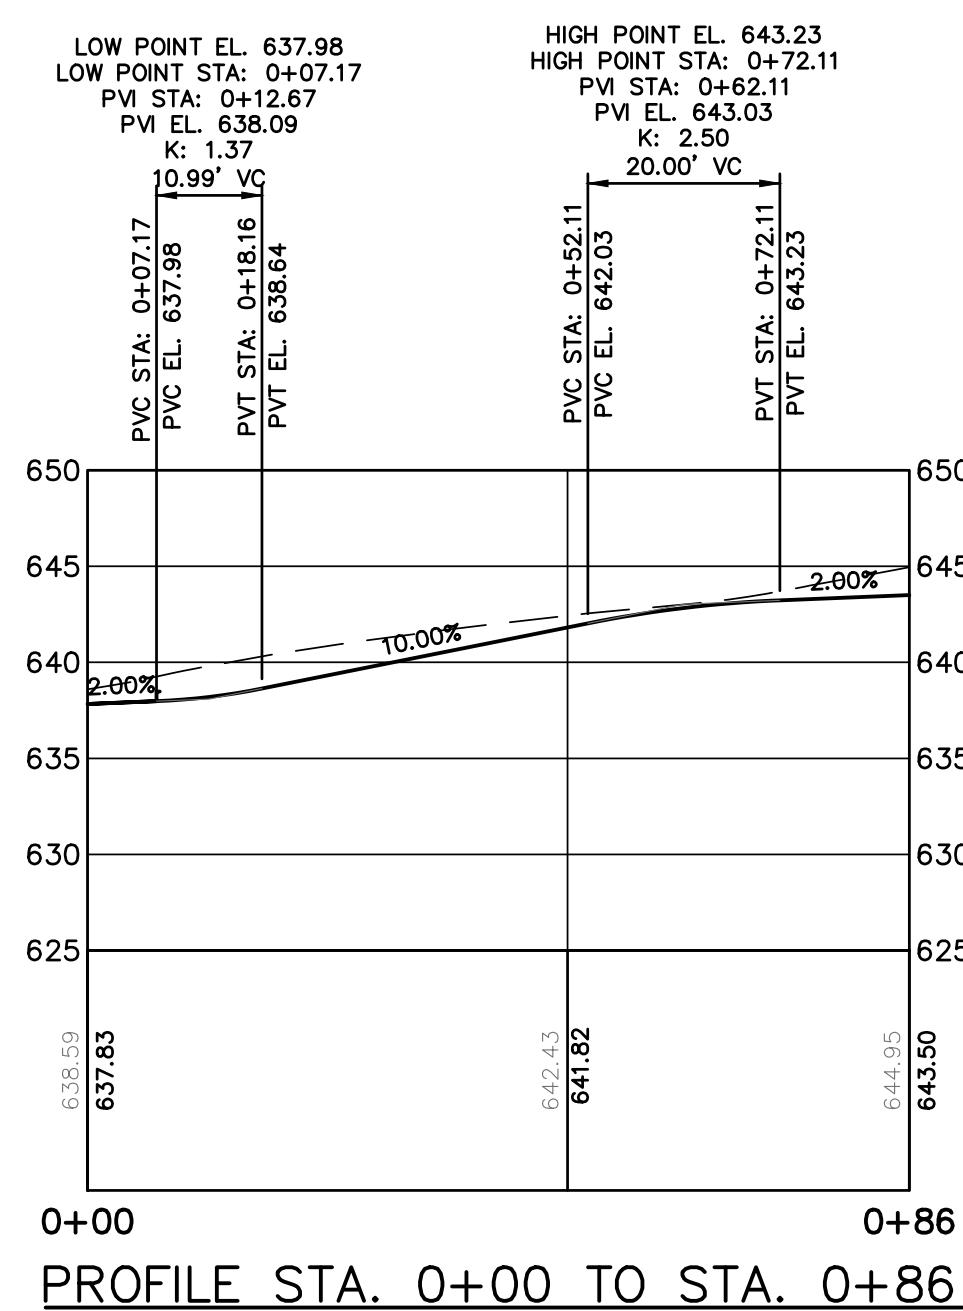



PROFILE STA. 0+00 TO STA. 0+86
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 10'
DRIVEWAY - LOT 8

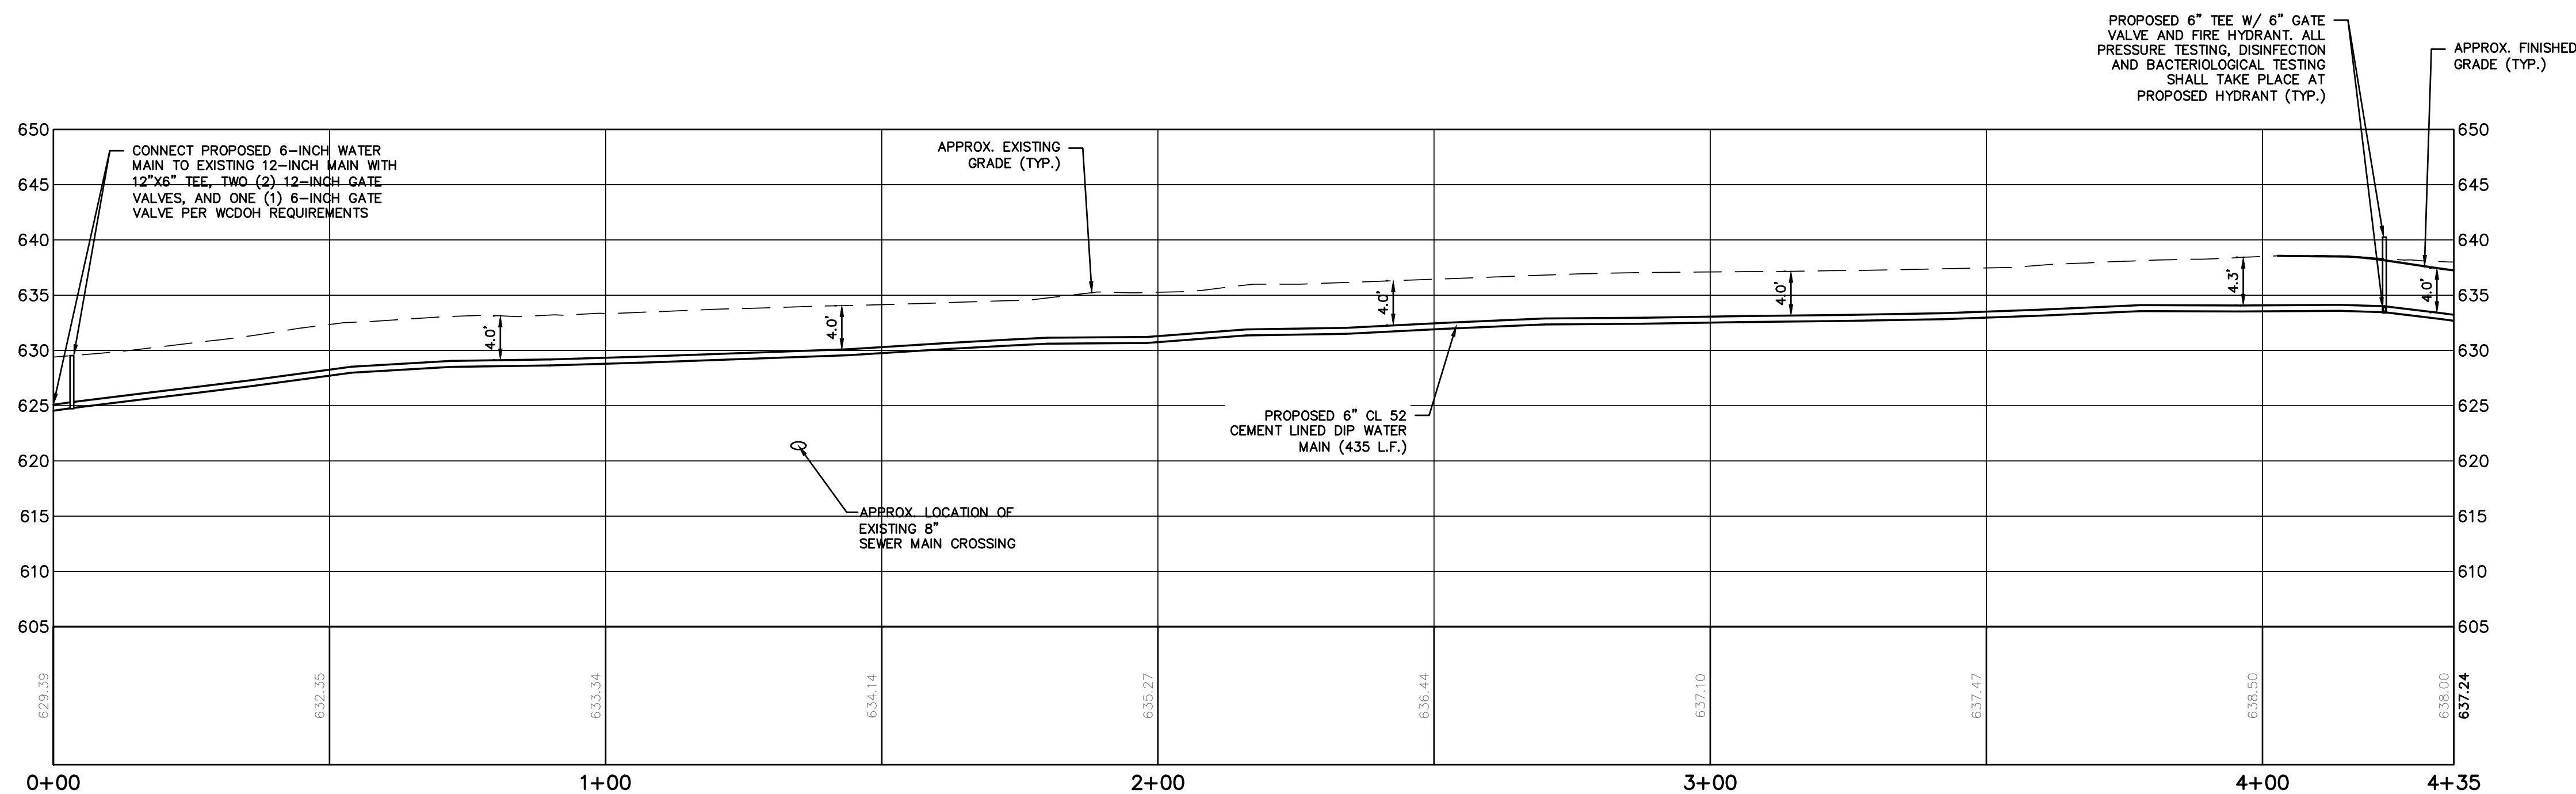

WATER MAIN PROFILE
(STA. 0+00 TO STA. 4+35)
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 10'









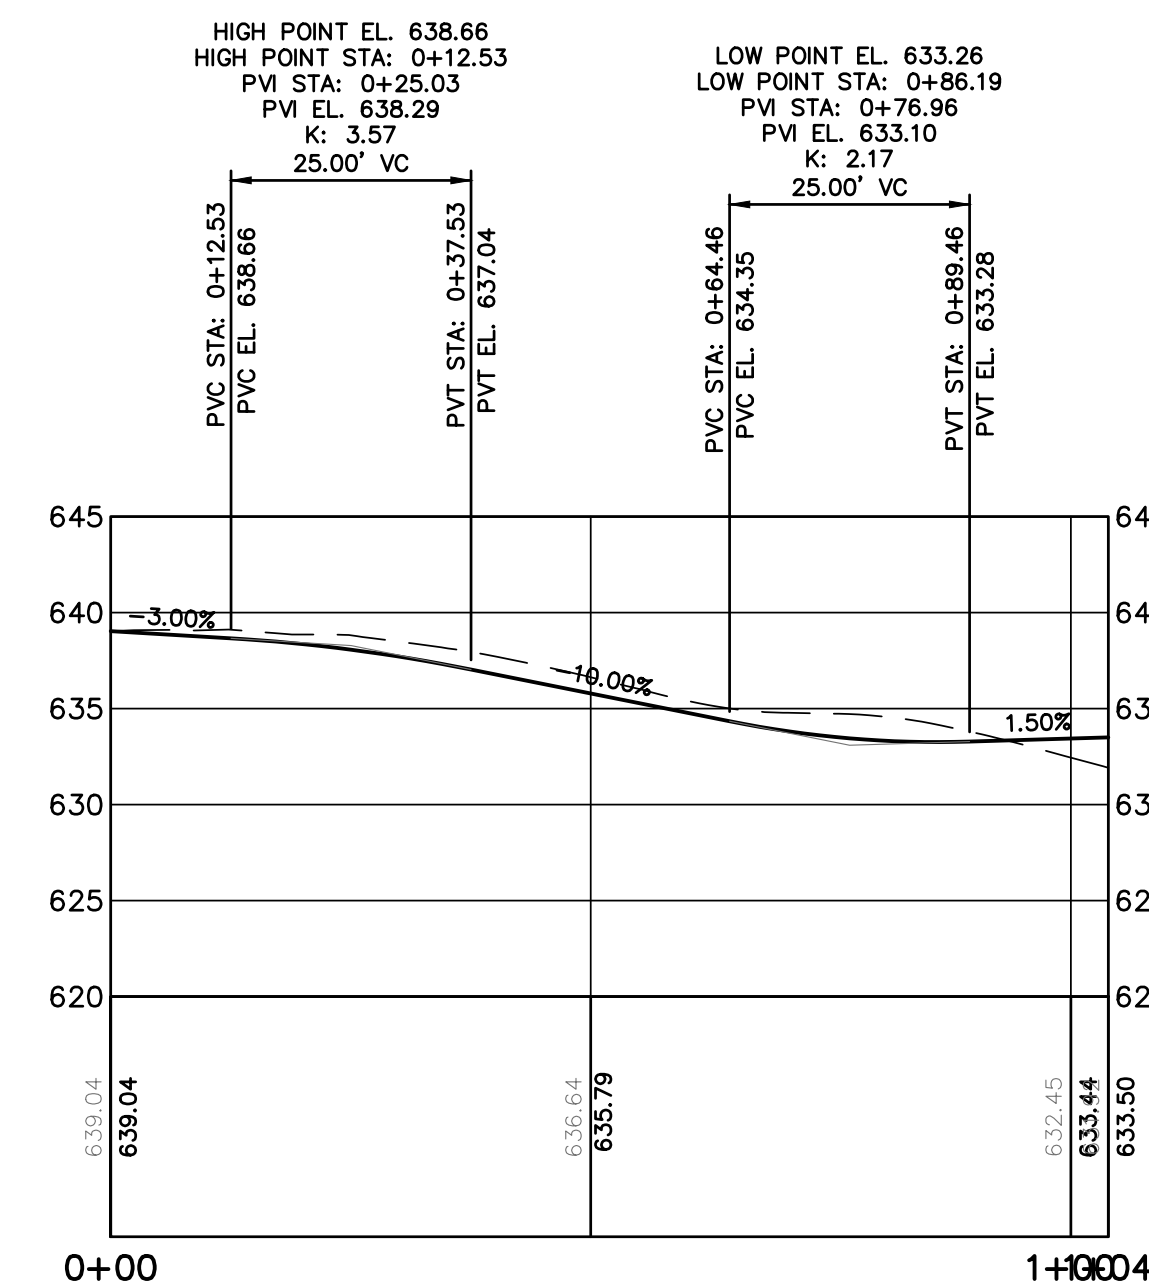


PROFILE STA. 0+00 TO STA. 1+04
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 10'
DRIVEWAY - LOT 8.1

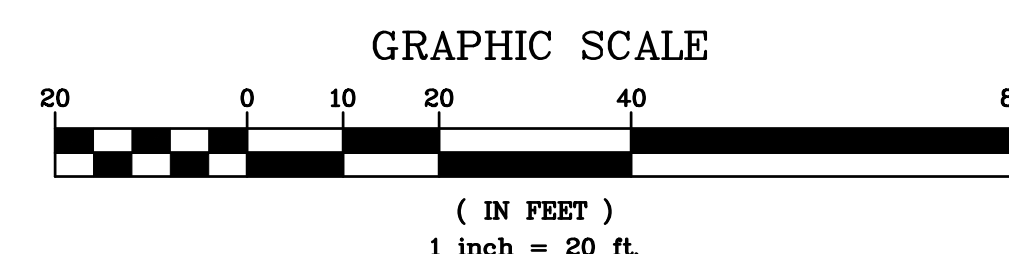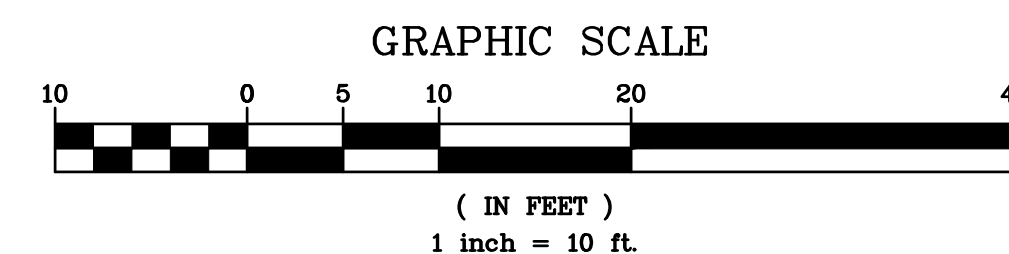


ANY ALTERATIONS OR REVISIONS OF THESE PLANS, UNLESS DONE BY OR UNDER THE DIRECTION OF THE NYS LICENSED AND REGISTERED ENGINEER THAT PREPARED THEM, IS A VIOLATION OF THE NYS EDUCATION LAW.

PROJECT:	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DATE:	10/17/25
SCALE:	AS NOTED
DESIGNED BY:	D.C.
CHECKED BY:	M.S.
SHEET NO.	5
EXPIRES:	05/31/26
ENGINEER:	HEC
CONSULTING, P.C.	45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
C-4	

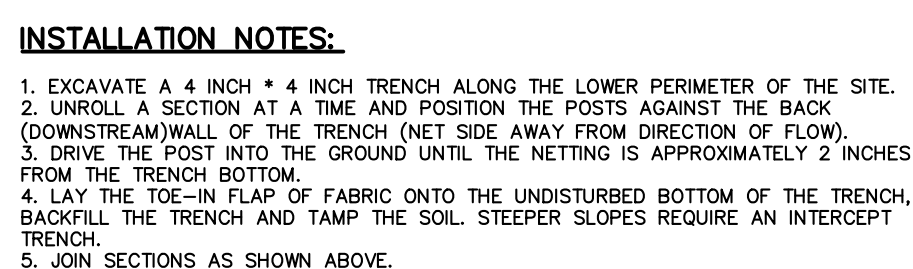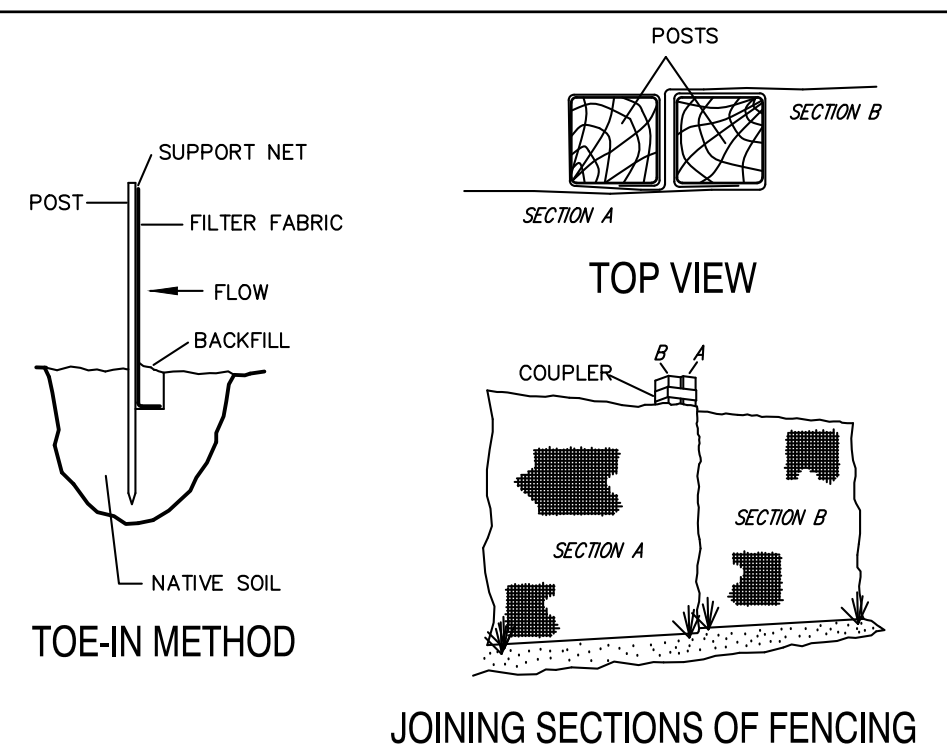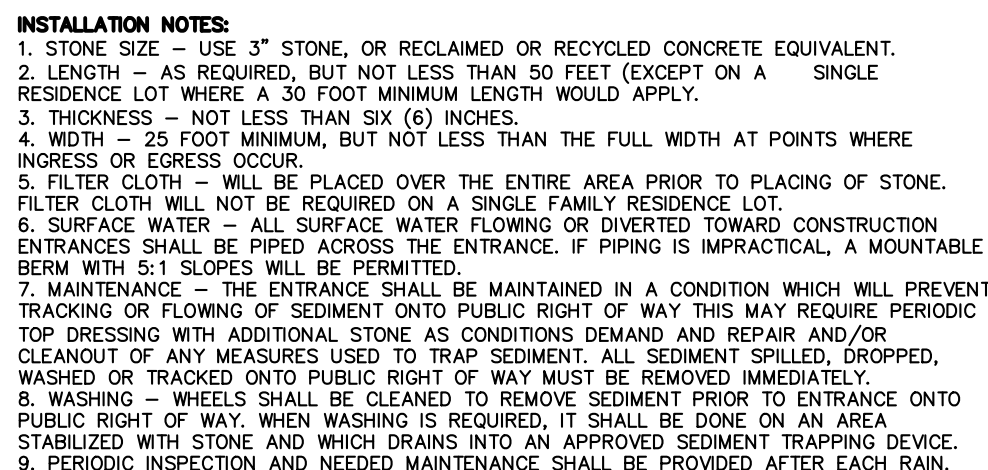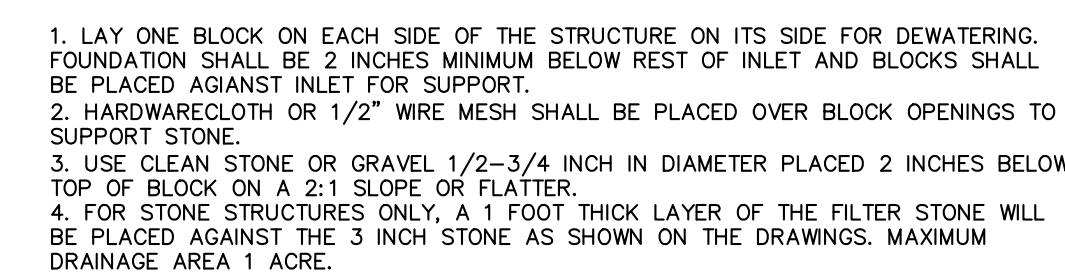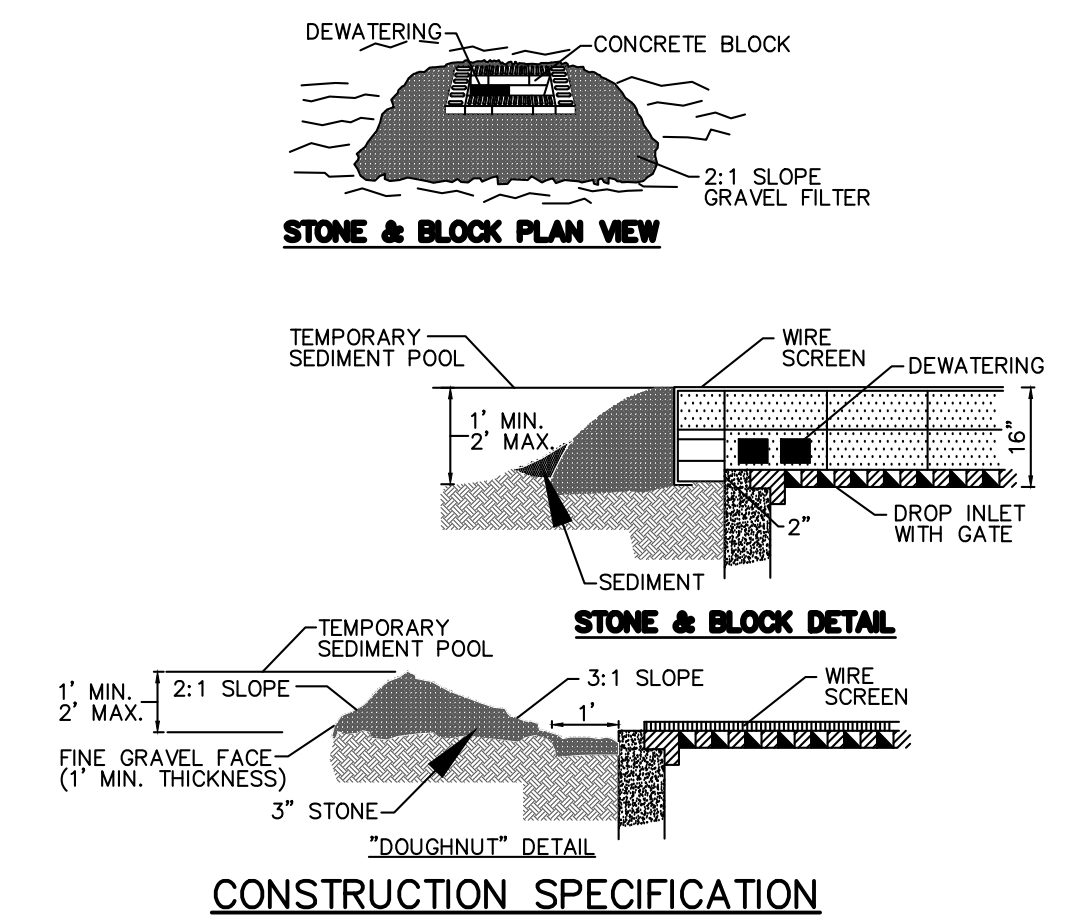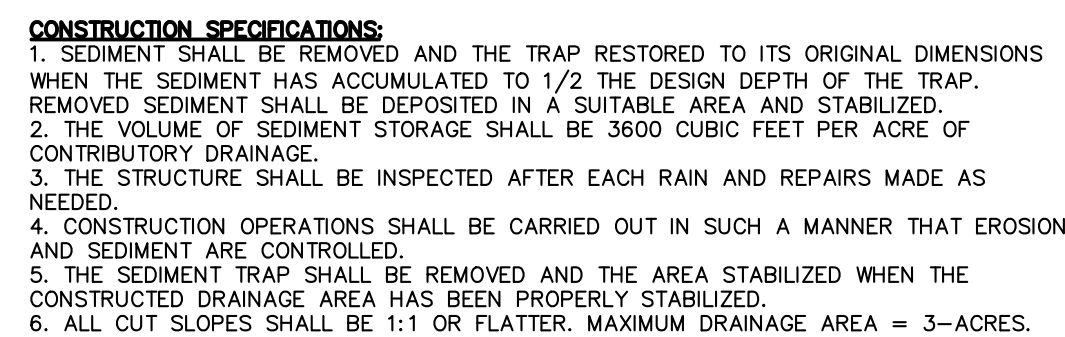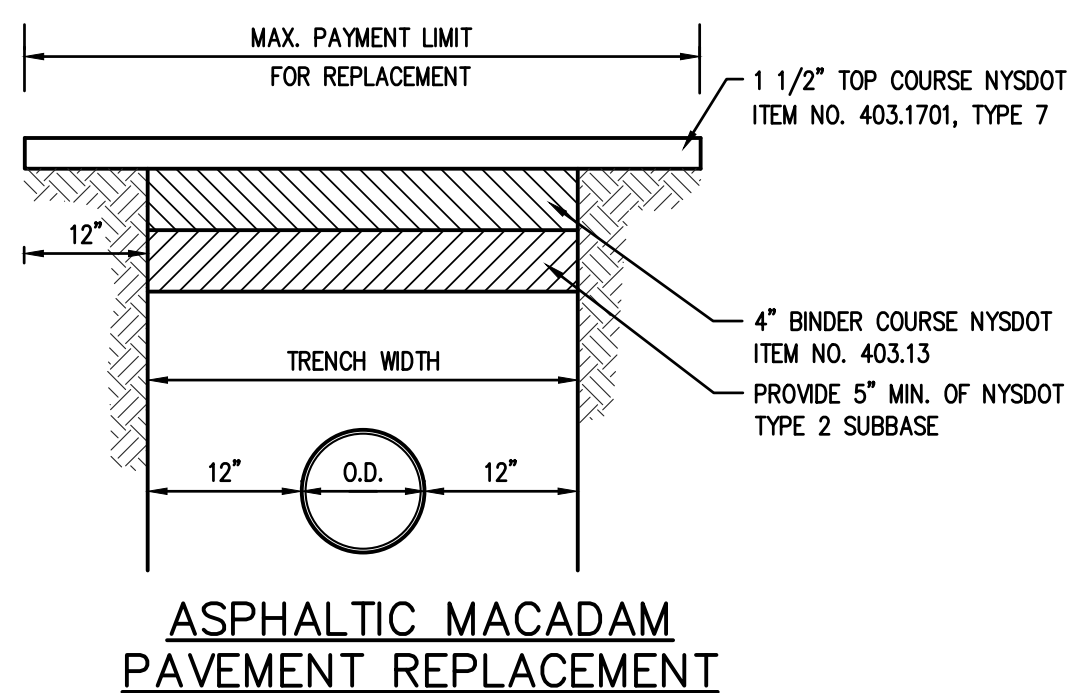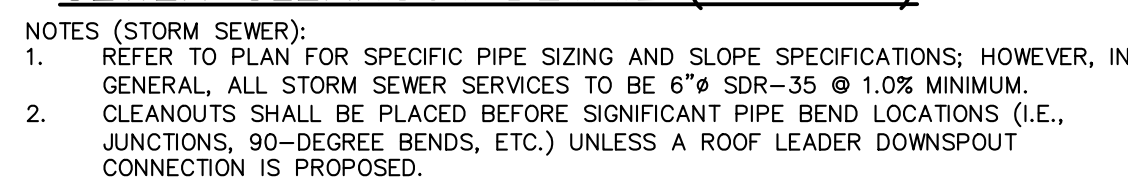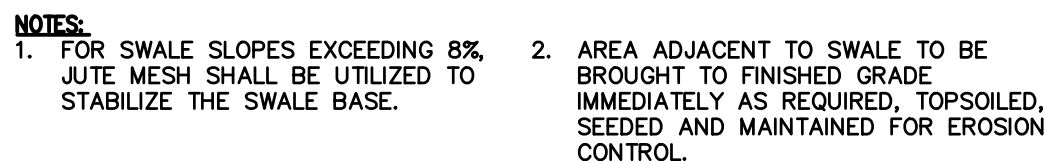


2/24/26		Date	
REVISED PER TOWN COMMENTS		Description	
1.		No.	
THIS PLAN NOT VALID FOR CONSTRUCTION WITHOUT ENGINEERS SEAL & SIGNATURE CERTIFICATE OF AUTHORIZATION: 0018897 PROPOSED 2--LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY -- NEW YORK			
PROJECT:		EXP. 05/31/26 Date: 10/17/25 Sheet: 6 Scale: AS NOTED Designed By: D.C. Checked By: M.S. Sheet No. © 2025	
HEC HUDSON ENGINEERING & CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmford, New York 10523 T: 914-909-0420 F: 914-560-2086		C-5 STATE OF NEW YORK MICHAEL F. STEIN  REGISTERED PROFESSIONAL ENGINEER No. 80637	
DETAILS			

ANY ALTERATIONS OR REVISIONS OF THESE PLANS, UNLESS DONE BY OR UNDER THE DIRECTION OF THE NYS LICENSED AND REGISTERED ENGINEER THAT PREPARED THEM, IS A VIOLATION OF THE NYS EDUCATION LAW.

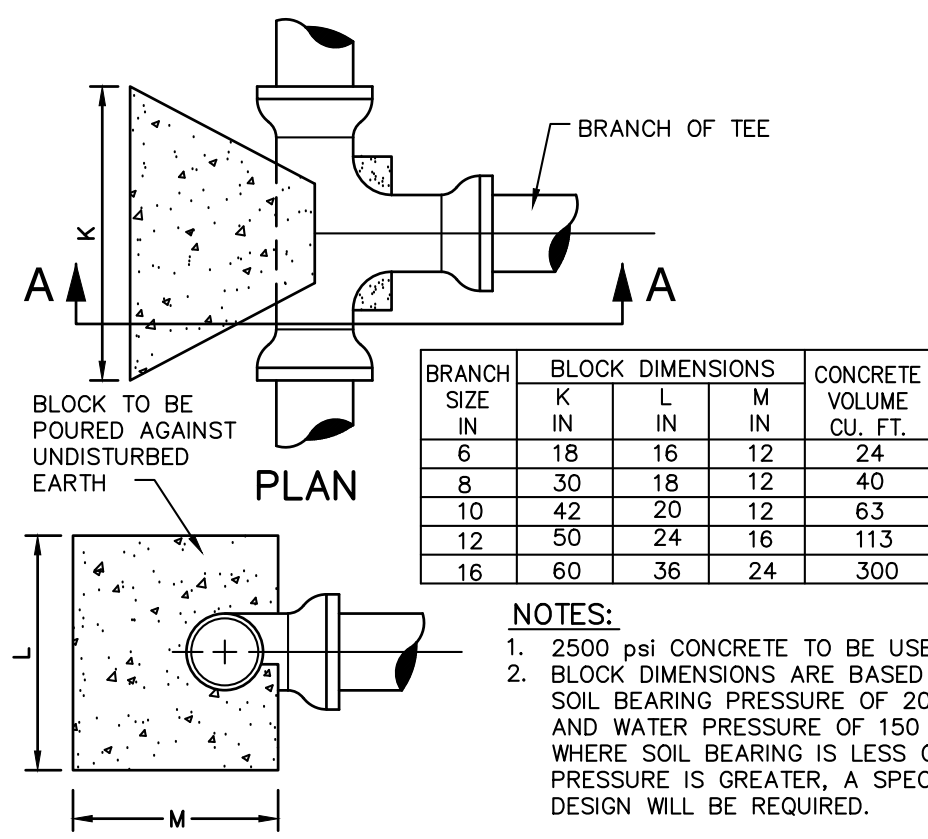


TEES

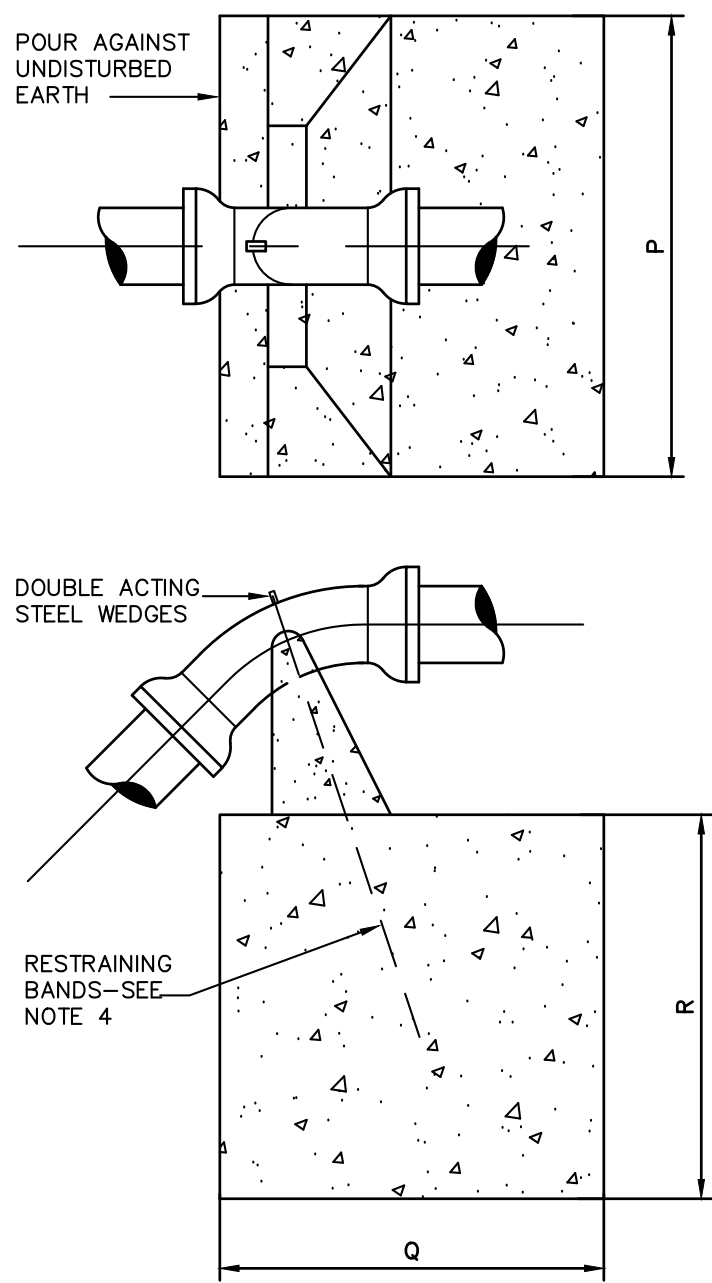

PIPE DIA. IN.	BEND	P IN.	Q IN.	R IN.	CONCRETE VOLUME CU. YD.
45	72	60	56	52	
16	22 1/2	60	48	44	27
11 1/4	60	36	36	14	
45	60	48	48	3.0	
12	22 1/2	42	42	40	15
11 1/4	34	34	34	0.84	
45	54	42	42	2.0	
10	22 1/2	36	36	36	1.0
11 1/4	30	30	30	0.58	
45	48	36	36	1.3	
8	22 1/2	32	32	32	0.71
11 1/4	26	26	26	0.38	
45	42	30	28	0.76	
6	22 1/2	26	26	26	0.38
11 1/4	24	24	24	0.30	



- NOTES:**
- 2500 psi concrete to be used
 - BLOCK DIMENSIONS ARE BASED UPON SOIL BEARING PRESSURE OF 2000 psi AND WATER PRESSURE OF 150 psi. WHERE SOIL BEARING IS LESS OR WATER PRESSURE IS GREATER, A SPECIAL DESIGN WILL BE REQUIRED.
 - WHERE 90° CREST VERTICAL BEND IS REQUIRED APPROVAL MUST FIRST BE OBTAINED FROM THE ENGINEER. A SPECIAL DESIGN WILL BE REQUIRED.
 - 2-#6 REINFORCING RODS REQUIRED FOR 16" 45° BEND; 1#6 REINFORCING ROD REQUIRED FOR ALL OTHER BENDS. EXPOSED BARS TO BE PROVIDED WITH PROTECTIVE COATING.

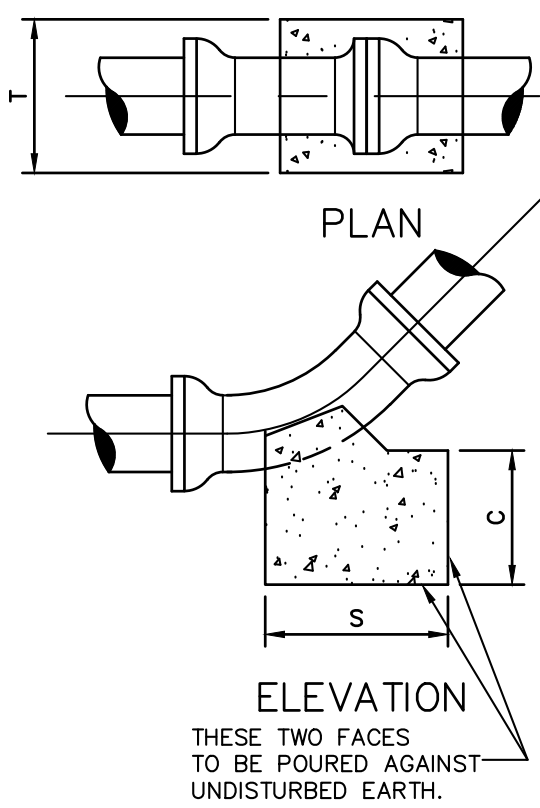

PIPE DIA. IN.	BEND	S IN.	T IN.	U IN.	CONCRETE VOLUME CU. FT.
90	48	48	48	640	
45	48	34	20	189	
22 1/2	42	20	18	88	
11 1/4				(3)	
90	36	36	36	270	
45	36	24	18	90	
22 1/2	28	18	12	35	
11 1/4				(3)	
90	30	30	30	156	
45	30	20	18	63	
22 1/2	22	16	12	24	
11 1/4				(3)	
90	24	24	24	80	
45	24	16	12	27	
22 1/2	18	12	12	15	
11 1/4				(3)	
90	18	18	18	34	
45	18	12	12	15	
22 1/2	12	12	12	10	
11 1/4				(3)	


- NOTES:**
- 2500 psi concrete to be used
 - BLOCK DIMENSIONS ARE BASED UPON SOIL BEARING PRESSURE OF 2000 psi AND WATER PRESSURE OF 150 psi. WHERE SOIL BEARING IS LESS OR WATER PRESSURE IS GREATER, A SPECIAL DESIGN WILL BE REQUIRED.
 - BEND TO BE SET AGAINST UNDISTURBED EARTH, BACKFILL TO BE FIRMLY TAMPED, OR BLOCK TO BE FURNISHED AS DIRECTED BY THE ENGINEER.

SAG VERTICAL BENDS

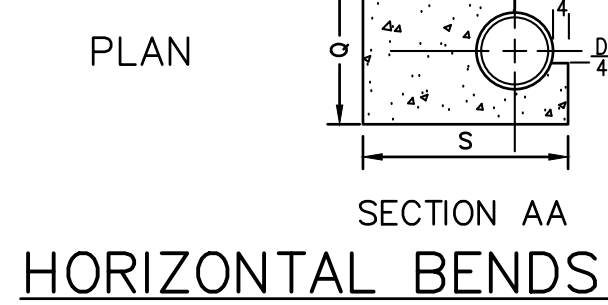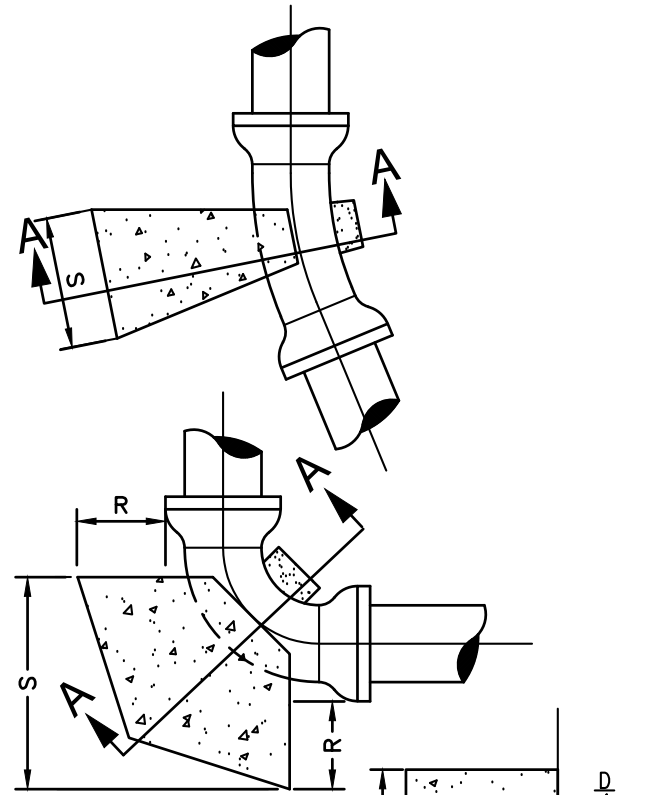


PIPE DIA. IN.	BEND	S IN.	Q IN.	R IN.	CONCRETE VOLUME CU. FT.
90	48	48	48	640	
45	48	34	20	189	
22 1/2	42	20	18	88	
11 1/4				(3)	
90	36	36	36	270	
45	36	24	18	90	
22 1/2	28	18	12	35	
11 1/4				(3)	
90	30	30	30	156	
45	30	20	18	63	
22 1/2	22	16	12	24	
11 1/4				(3)	
90	24	24	24	80	
45	24	16	12	27	
22 1/2	18	12	12	15	
11 1/4				(3)	
90	18	18	18	34	
45	18	12	12	15	
22 1/2	12	12	12	10	
11 1/4				(3)	

- NOTES:**
- 2500 psi concrete to be used
 - BLOCK DIMENSIONS ARE BASED UPON SOIL BEARING PRESSURE OF 2000 psi AND WATER PRESSURE OF 150 psi. WHERE SOIL BEARING IS LESS OR WATER PRESSURE IS GREATER, A SPECIAL DESIGN WILL BE REQUIRED.

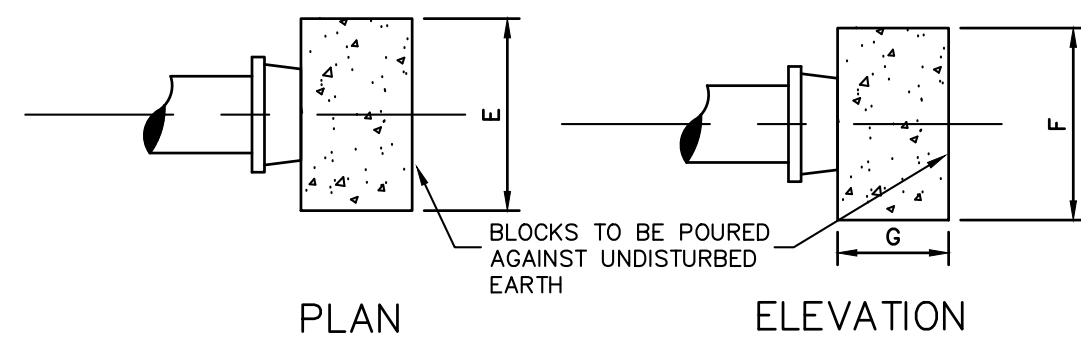


- NOTES:**
- 2500 psi concrete to be used
 - BLOCK DIMENSIONS ARE BASED UPON SOIL BEARING PRESSURE OF 2000 psi AND WATER PRESSURE OF 150 psi. WHERE SOIL BEARING IS LESS OR WATER PRESSURE IS GREATER, A SPECIAL DESIGN WILL BE REQUIRED.
 - FOR USE ON ABANDONED LINES AND DEAD ENDS WHERE NO EXTENSION IS CONTEMPLATED.

CAPS, PLUGS AND VALVES

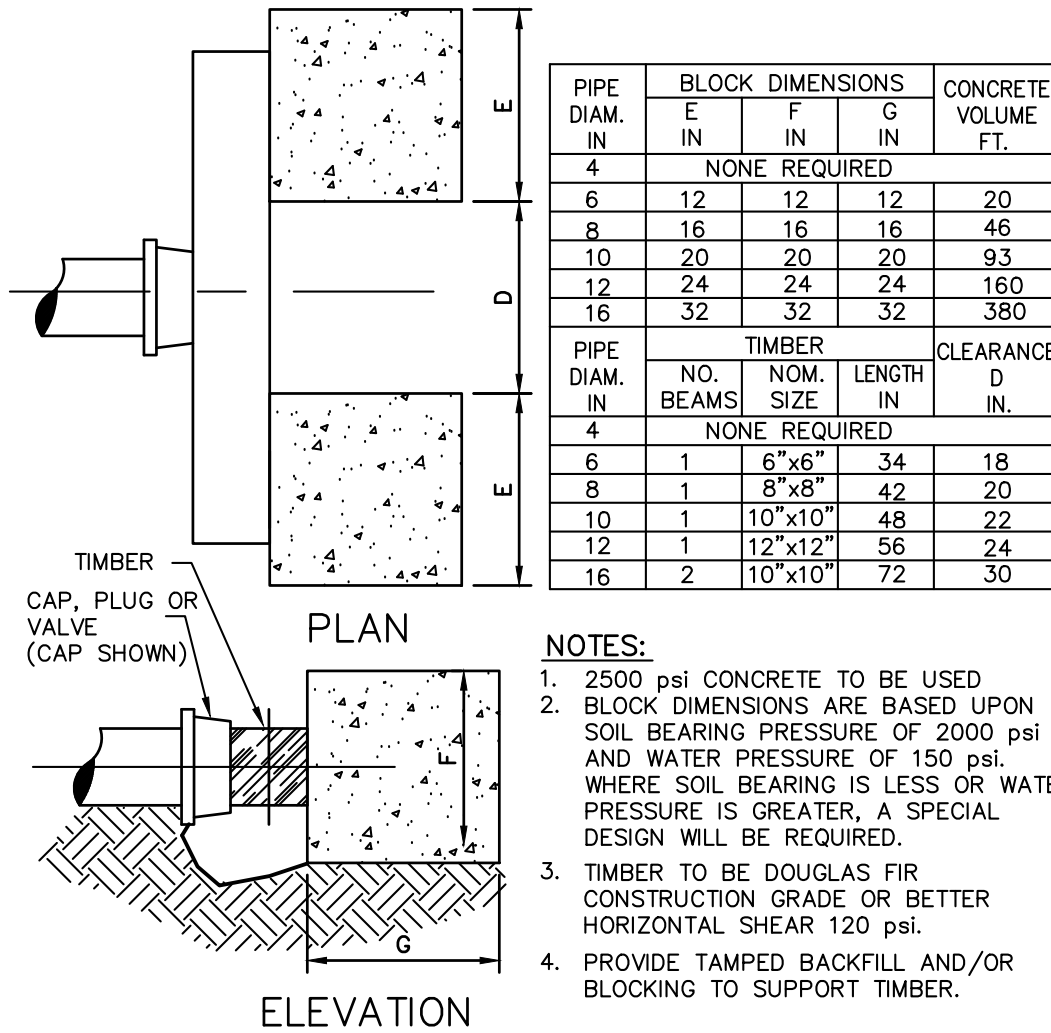


- NOTES:**
- 2500 psi concrete to be used
 - BLOCK DIMENSIONS ARE BASED UPON SOIL BEARING PRESSURE OF 2000 psi AND WATER PRESSURE OF 150 psi. WHERE SOIL BEARING IS LESS OR WATER PRESSURE IS GREATER, A SPECIAL DESIGN WILL BE REQUIRED.
 - TIMBER TO BE DOUGLAS FIR CONSTRUCTION GRADE OR BETTER HORIZONTAL SHEAR 120 psi.
 - PROVIDE TAMPED BACKFILL AND/OR BLOCKING TO SUPPORT TIMBER.

DEAD ENDS

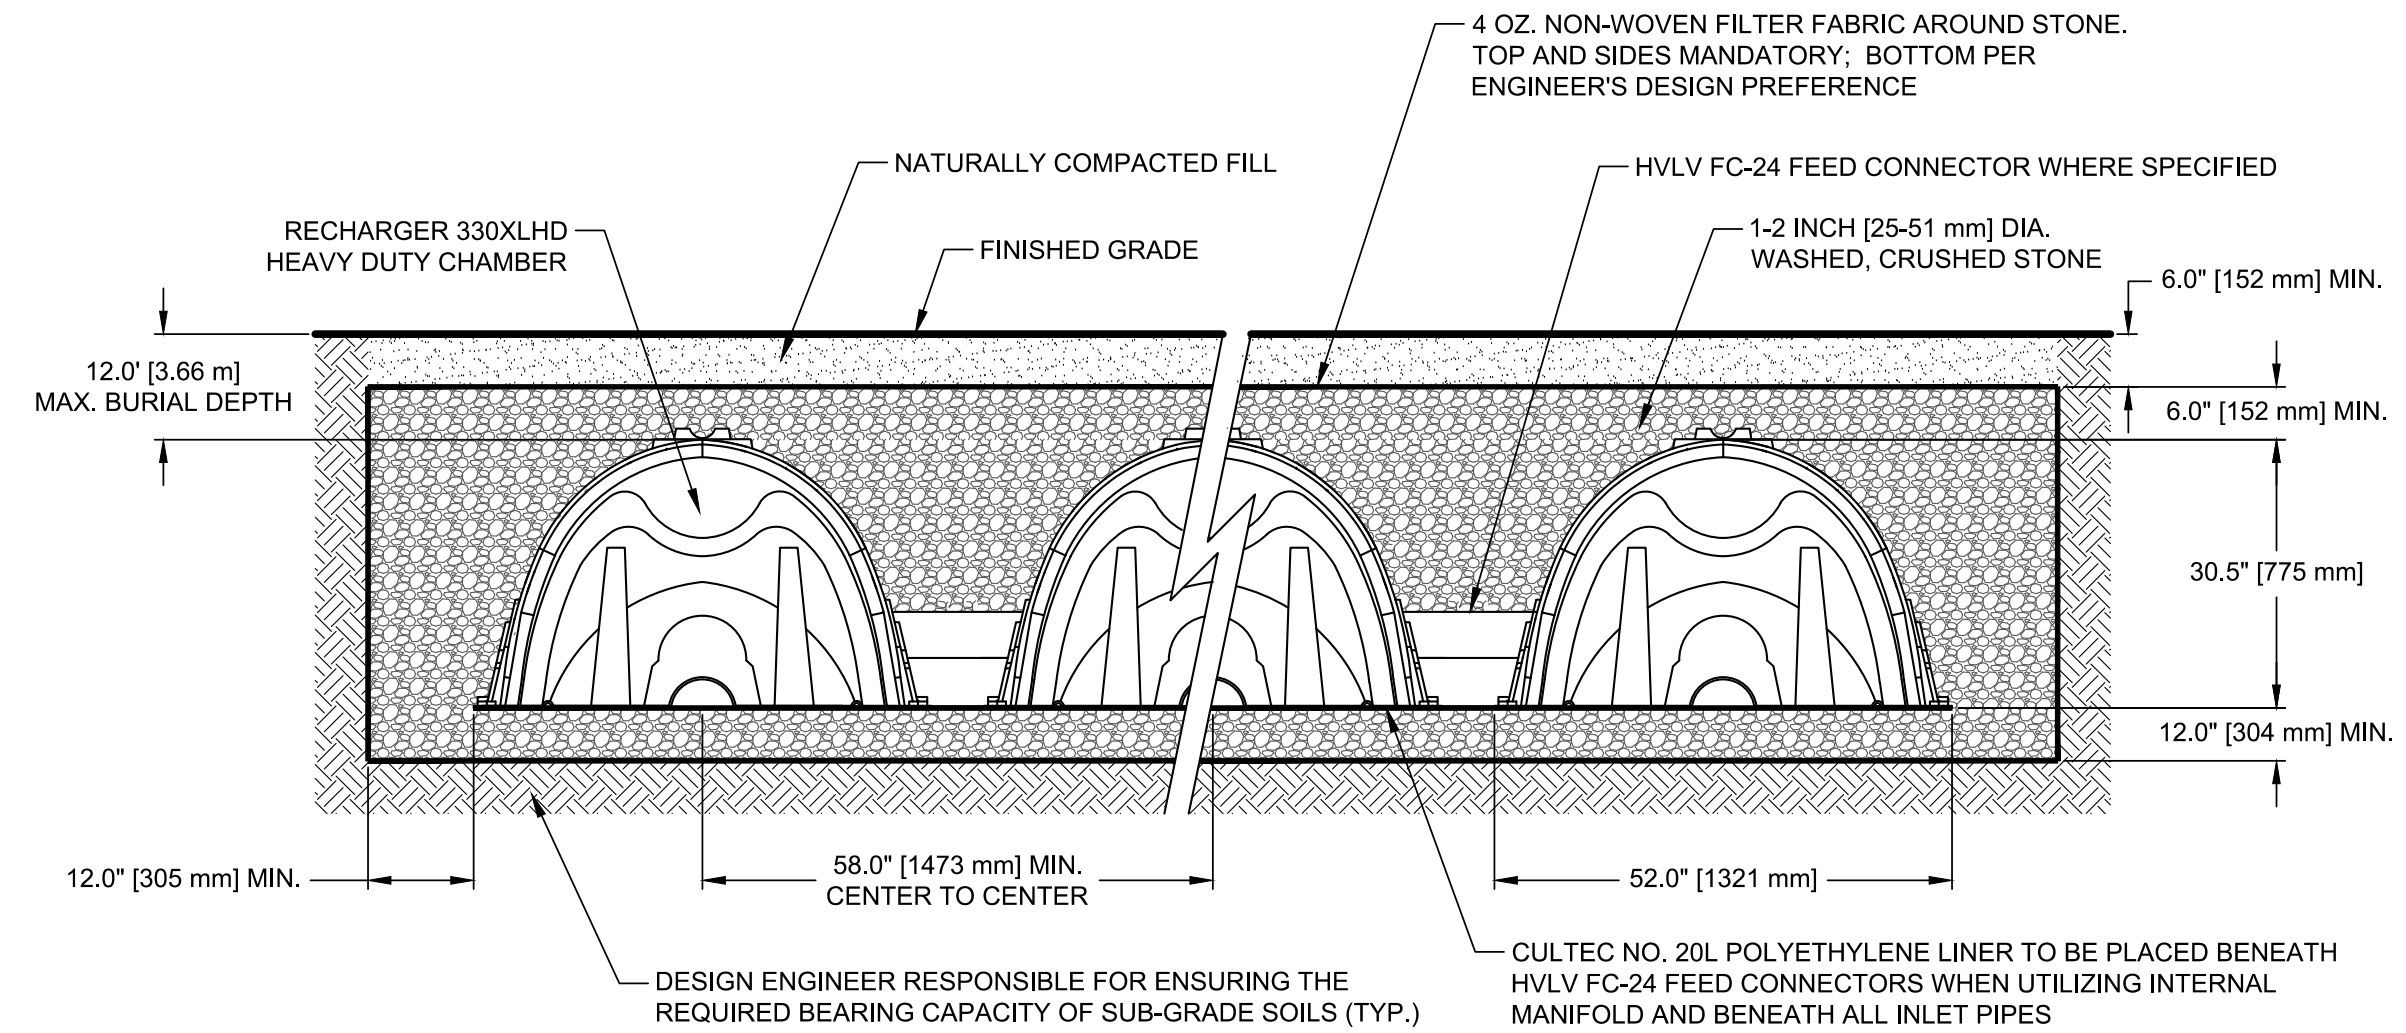


TYPICAL CROSS SECTION RECHARGER 330XL

- CULTEC GENERAL NOTES**
- RECHARGER 330XL HD BY CULTEC, INC. OF BROOKFIELD, CT. STORAGE PROVIDED = 11.32 CF/FT [1.08 m³/m] PER DESIGN UNIT. REFER TO CULTEC, INC.'S CURRENT RECOMMENDED INSTALLATION GUIDELINES.
- THE CHAMBER WILL BE DESIGNED TO WITHSTAND TRAFFIC LOADS WHEN INSTALLED ACCORDING TO CULTEC'S RECOMMENDED INSTALLATION INSTRUCTIONS
- ALL RECHARGER 330XL HD HEAVY DUTY UNITS ARE MARKED WITH A COLOR STRIPE FORMED INTO THE PART ALONG THE LENGTH OF THE CHAMBER.
- ALL RECHARGER 330XL HD CHAMBERS MUST BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS

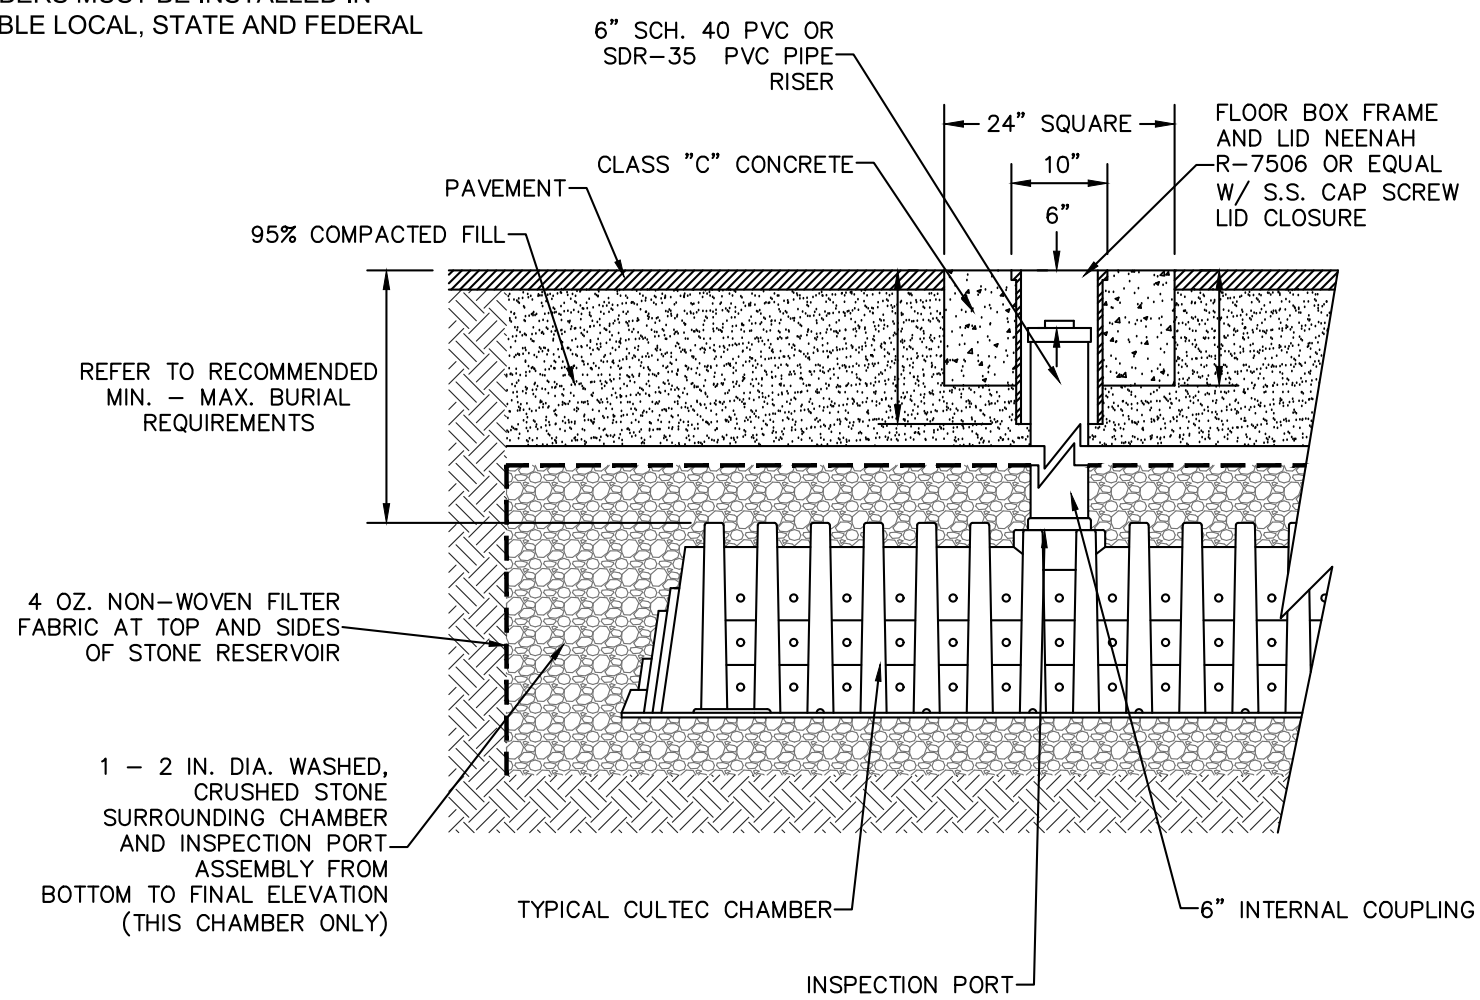


RECHARGER ACCESS PORT

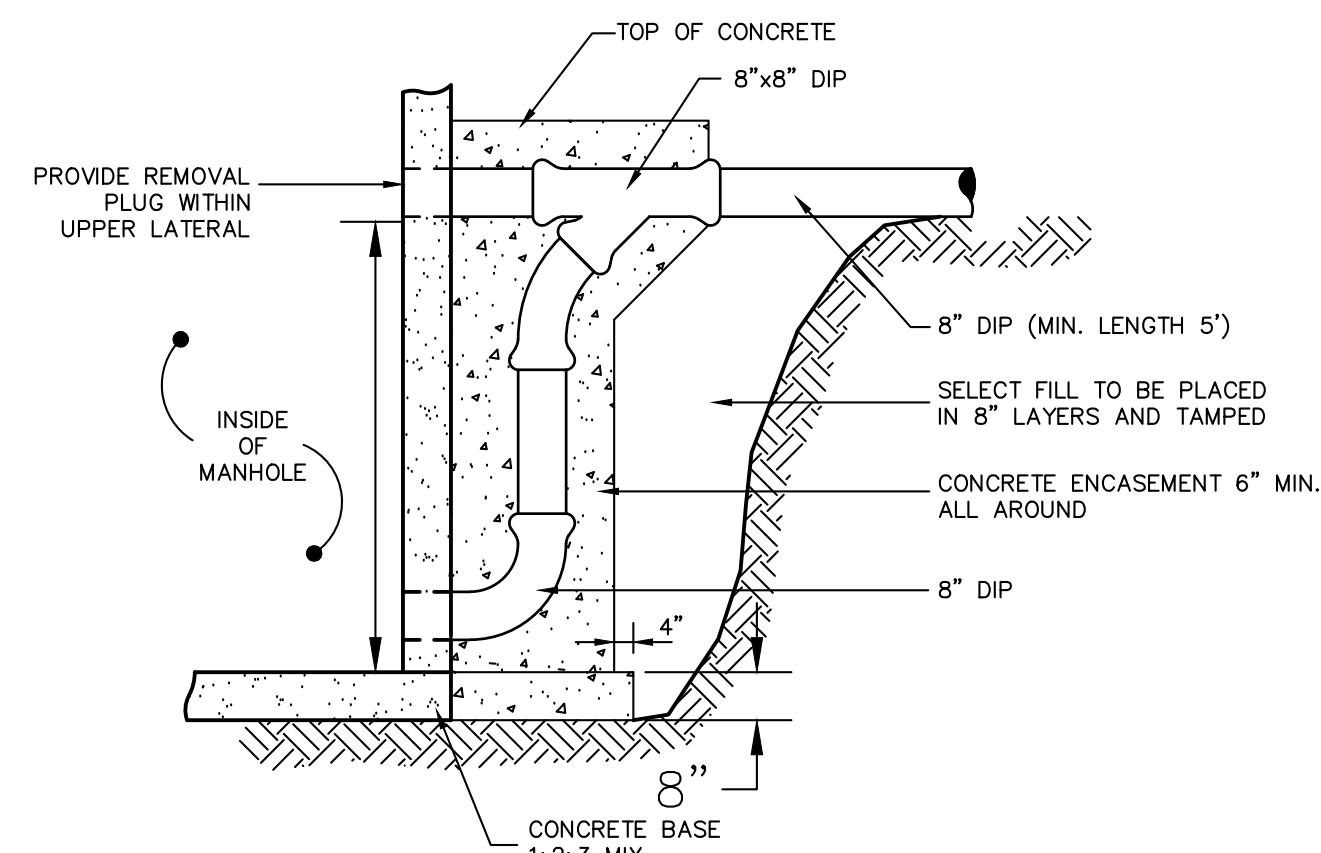

EXTERIOR DROP MANHOLE CONNECTION

- HYDRANT NOTES:**
- PUMPER OUTLET SHALL FACE STREET; HOSE OUTLETS SHALL BE PARALLEL TO STREET.
 - PLUMBNESS OF HYDRANT TO BE CHECKED IN TWO DIRECTIONS, 90° APART.
 - RODDING SHALL CONSIST OF TWO 3/4" THREADED RODS CAREFULLY COATED WITH BITUMASTIC PAINT. RODDING MAY BE OMITTED BETWEEN THE MAIN AND LATERAL VALVE ONLY WHERE A TAPPING VALVE OR HYDRANT VALVE ANCHORING TEE IS USED.
 - 1 1/2" STONE SHALL BE PLACED AROUND THE HYDRANT FROM THE BOTTOM OF THE TRENCH, BUT AT LEAST 6" BELLOW THE BASE OF THE HYDRANT TO 6" ABOVE THE WASTE OPENING AND TO A DISTANCE OF 12" AROUND THE ELBOW.
 - HYDRANTS WITH PLUGGED DRAINS SHALL HAVE A 3" BLACK CIRCLE PAINTED DIRECTLY UNDER THE PUMPER OUTLET.
 - HYDRANT DRAINS TO BE PLUGGED WHERE THE WATER TABLE IS WITHIN 7 FEET OF FINISHED GRADE. WHEN THE DRAINS ARE PLUGGED; THE BARRELS MUST BE PUMPED DRY AFTER USE DURING FREEZING WEATHER. WHERE HYDRANT DRAINS ARE NOT PLUGGED, A GRAVEL POCKET OR DRY WELL SHALL BE PROVIDED UNLESS THE NATURAL SOILS WILL PROVIDE ADEQUATE DRAINAGE. HYDRANT DRAINS SHALL NOT BE CONNECTED TO OR LOCATED WITHIN 10 FT. OF SANITARY SEWERS OR STORM DRAINS.
 - HYDRANT TO CONFORM TO VILLAGE SPECIFICATIONS.
 - AS PER SECTION 8.4.4 OF THE RECOMMENDED STANDARDS FOR WATER WORKS, 2003 EDITION:
 - HYDRANT DRAINS SHOULD BE PLUGGED. WHEN THE DRAINS ARE PLUGGED THE BARRELS MUST BE PUMPED DRY AFTER USE DURING FREEZING WEATHER.
 - WHERE HYDRANT DRAINS ARE NOT PLUGGED, A GRAVEL POCKET OR DRY WELL SHALL BE PROVIDED UNLESS THE NATURAL SOILS WILL PROVIDE ADEQUATE DRAINAGE.
 - HYDRANT DRAINS SHALL NOT BE CONNECTED TO OR LOCATED WITHIN 10 FEET OF SANITARY SEWERS, STORM SEWERS, OR STORM DRAINS.
 - HYDRANT DRAINS, WHERE ALLOWED, MUST BE ABOVE THE SEASONAL GROUNDWATER TABLE.

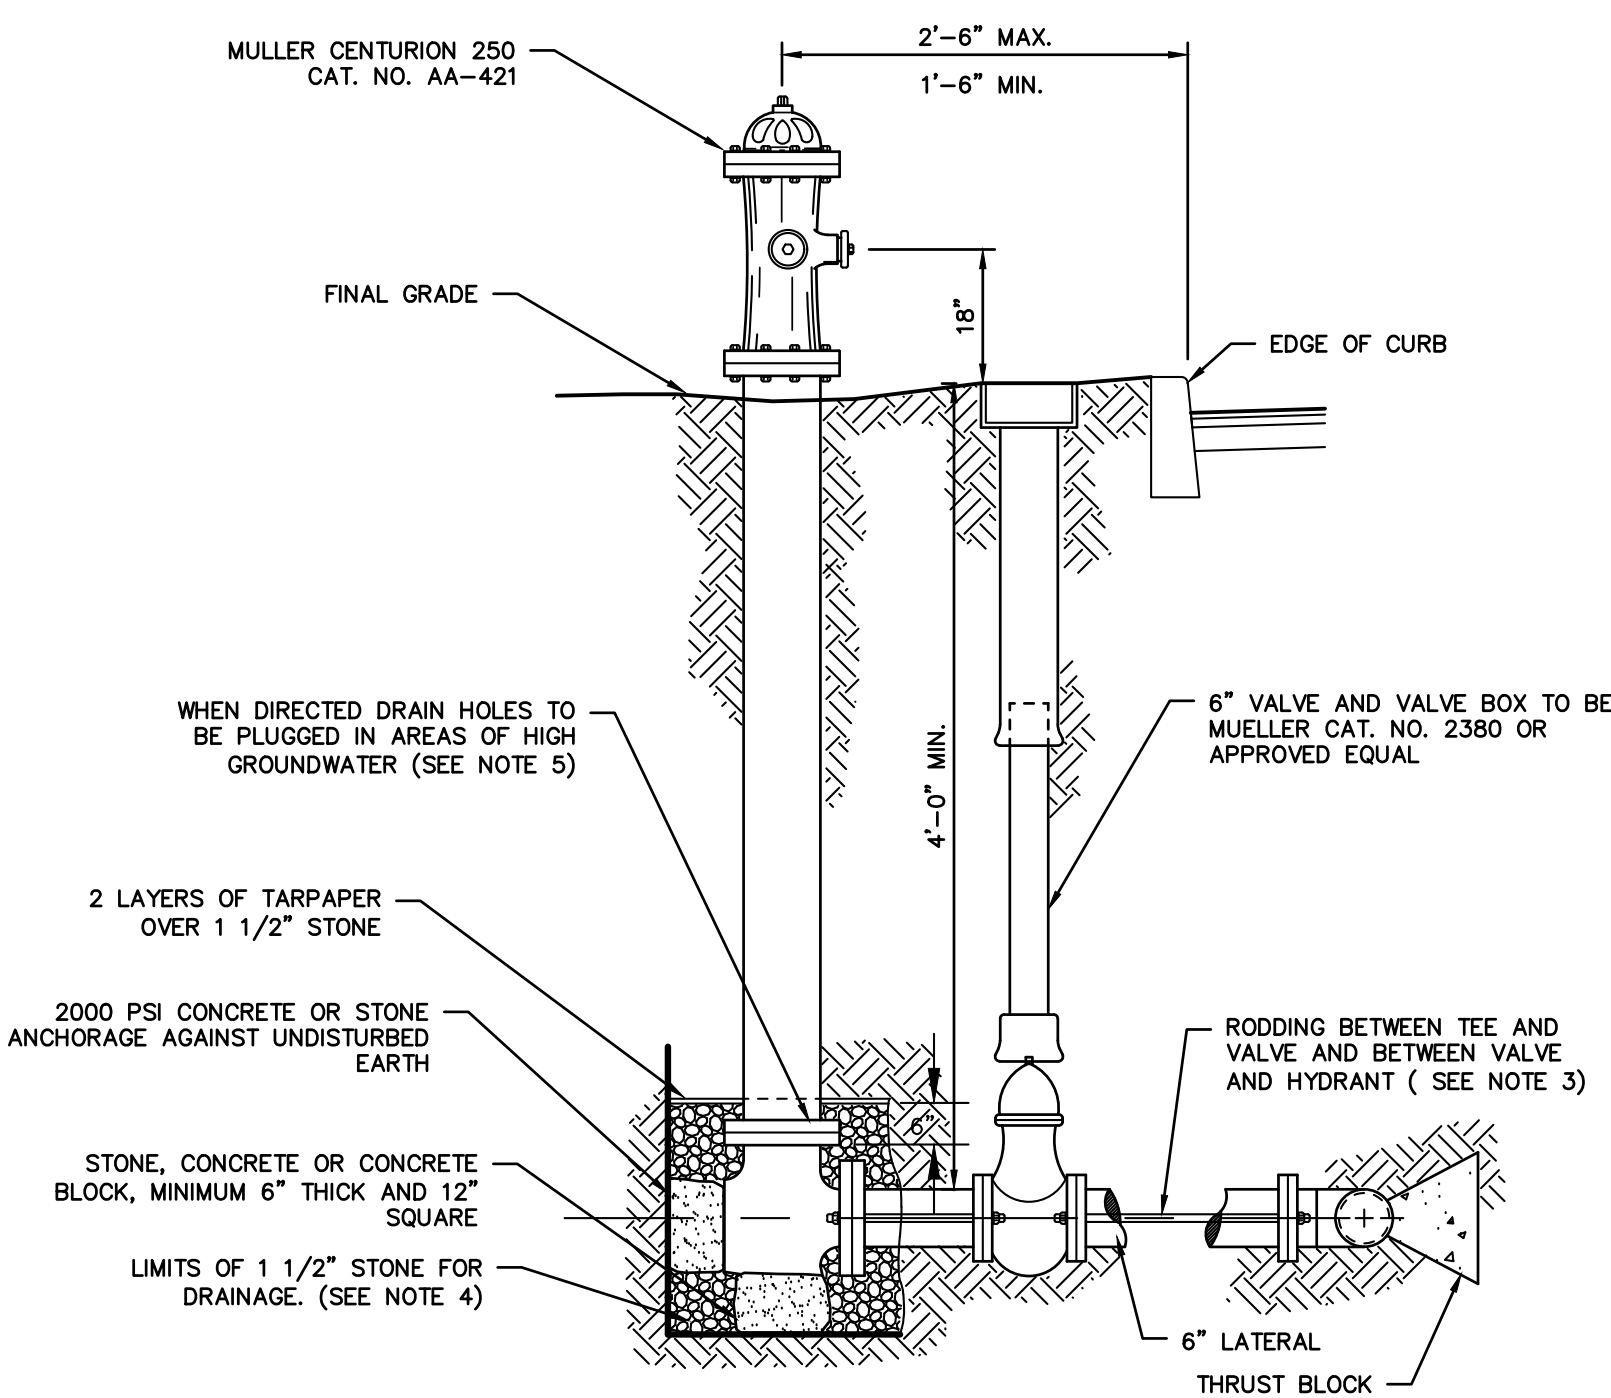


HYDRANT SETTING

ELEVATION


CREST VERTICAL BENDS

- NOTE:**
- IN ADDITION TO THE CONCRETE THRUST BLOCKS, ALL FITTINGS TO BE TIED TOGETHER WITH 3/4" GALVANIZED THREADED RODS, AND ANY OTHER SPECIALS AS DIRECTED BY THE WATER DISTRICT.

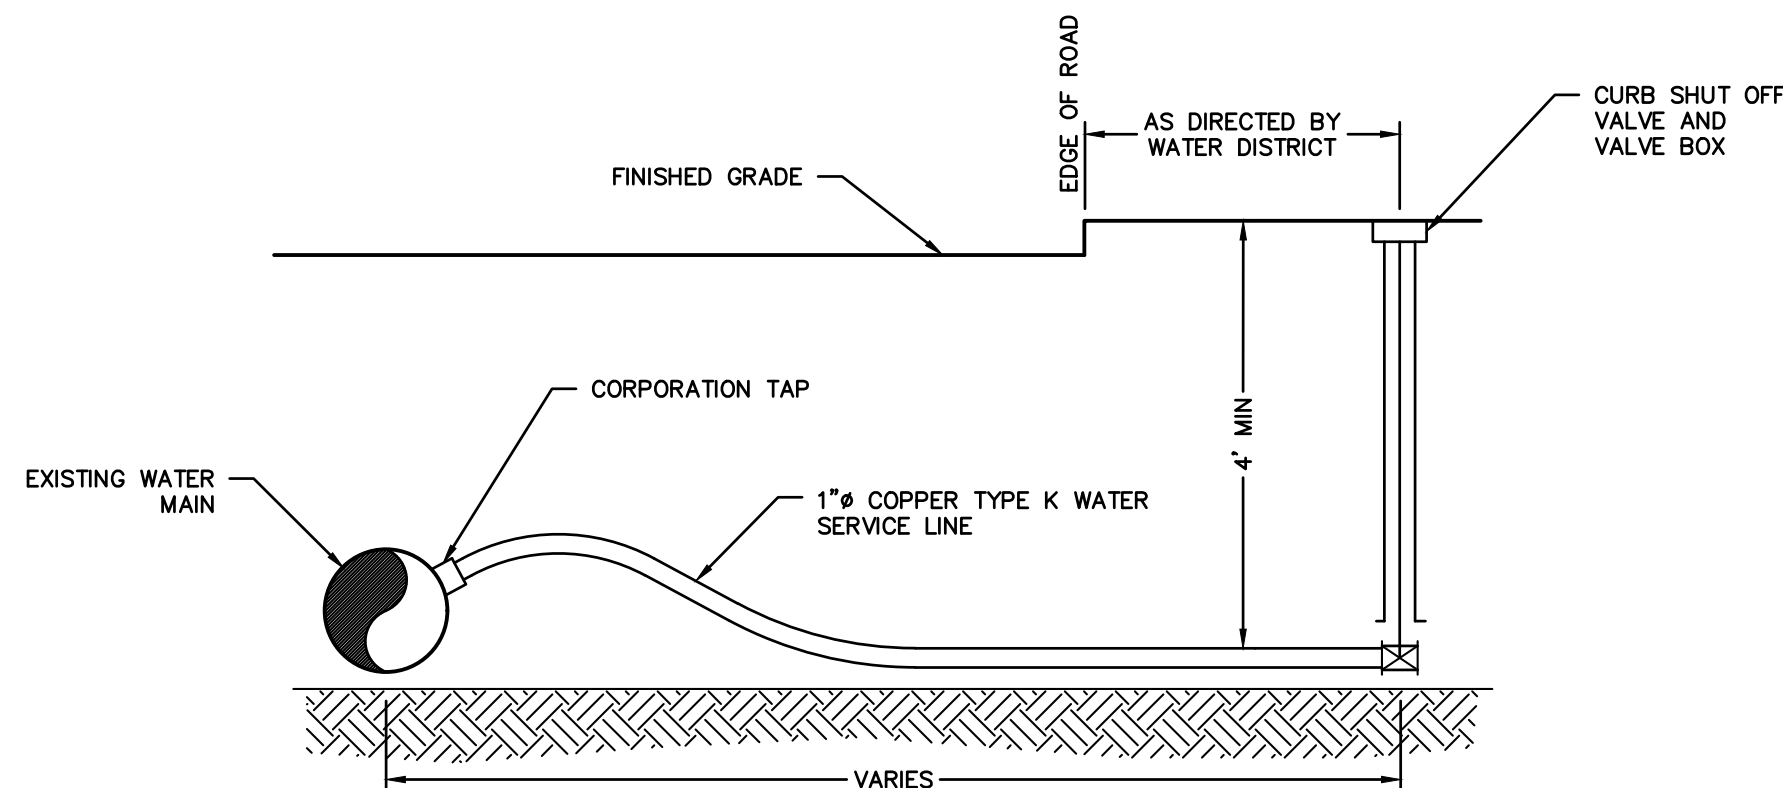

- NOTES:**
- WATER DISTRICT TO FURNISH AND INSTALL CORPORATION TAP, SERVICE LINE, AND CURB SHUT OFF VALVE AND VALVE BOX.
 - CONTRACTOR TO EXCAVATE, MAINTAIN, BACKFILL, AND RESTORE TRENCH FOR THE TAP, SERVICE LINE, AND CURB SHUT OFF VALVE.
 - CONTRACTOR TO TAKE OUT PERMIT, PAY FEE, AND TO FOLLOW ALL RULES AND REGULATIONS OF THE LOCAL UTILITY AGENCY.


WATER SERVICE LATERAL

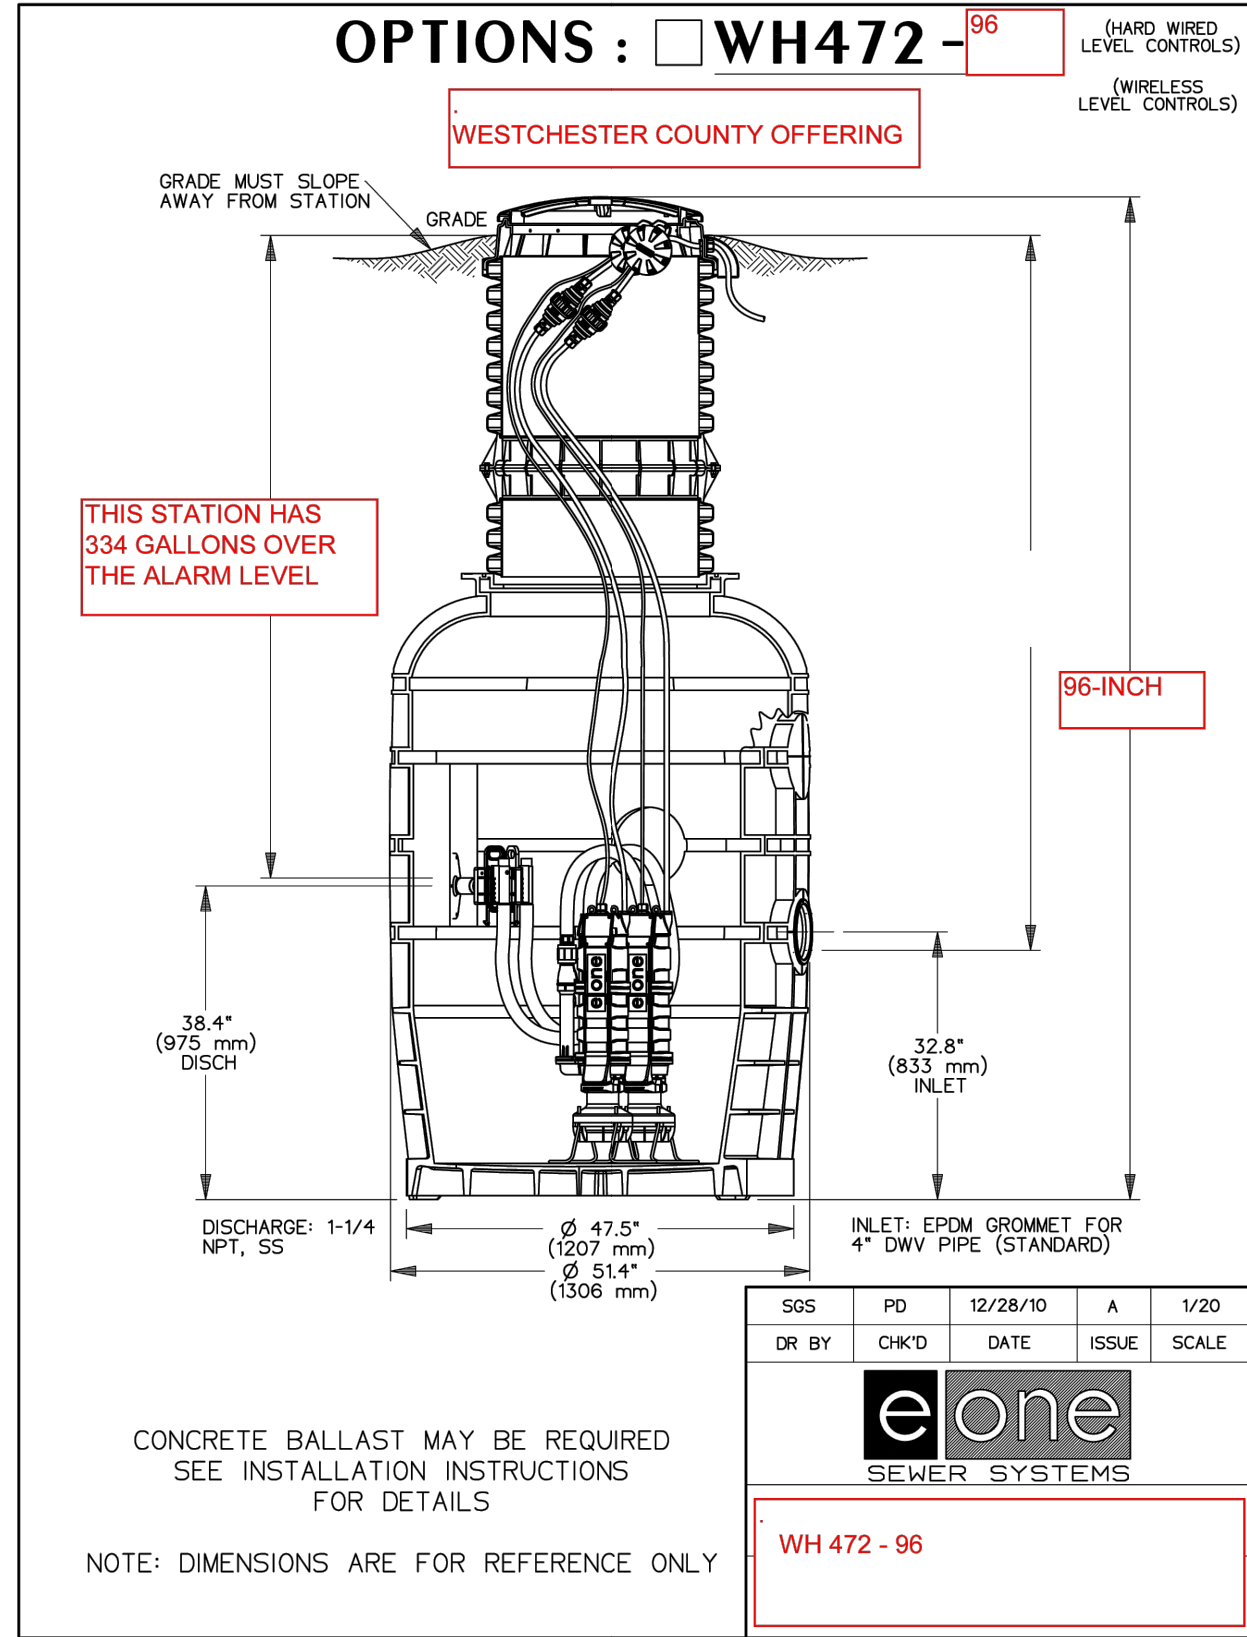


NOTE:

1. EONE PUMP STATION SHALL BE DUPLEX PUMP ARRANGEMENT WITH A PERMANENTLY INSTALLED QUICK CONNECT TRANSFER SWITCH FOR THE CONNECTION OF A STAND BY GENERATOR IN THE EVENT OF A POWER OUTAGE.


LOW PRESSURE SEWAGE PUMP

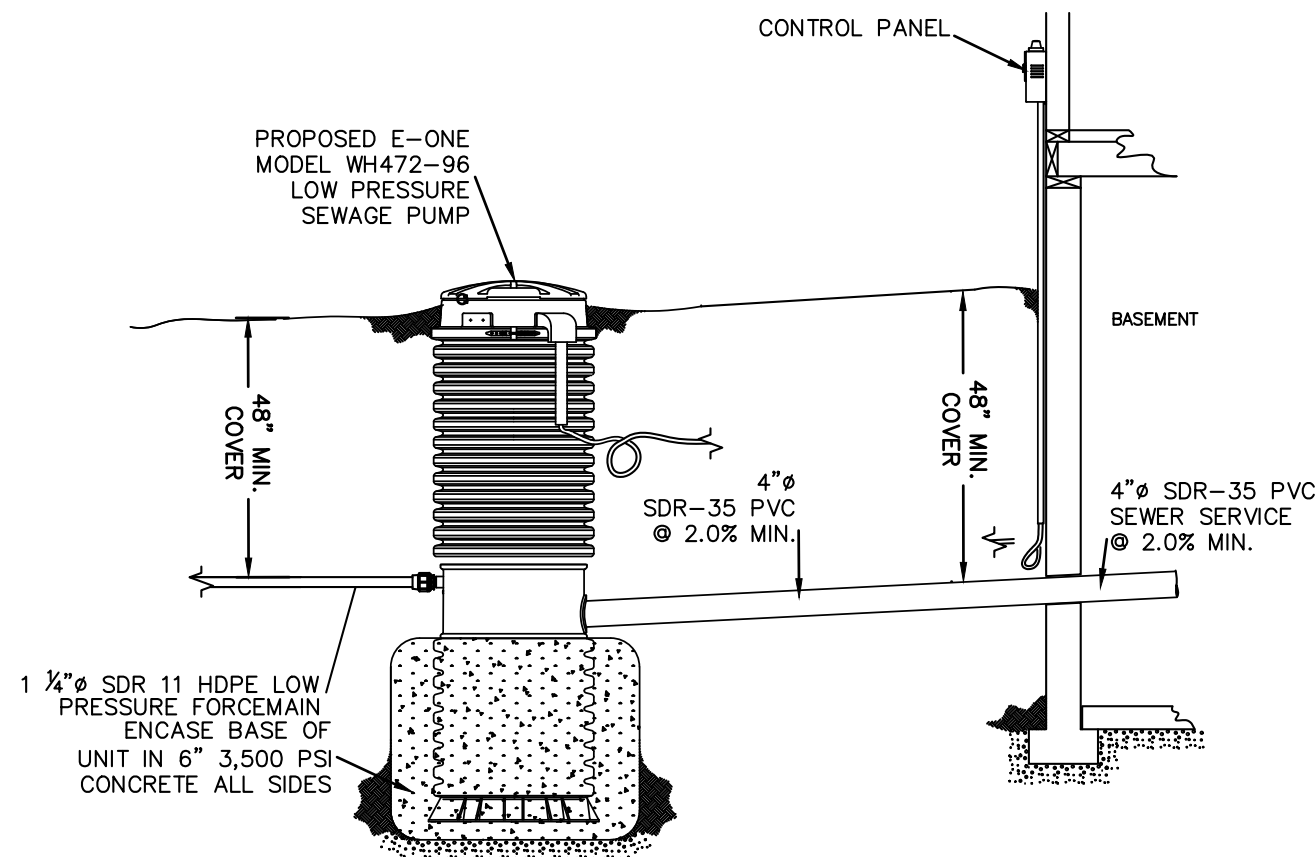


**LOW PRESSURE SEWAGE PUMP
TYPICAL INSTALLATION**

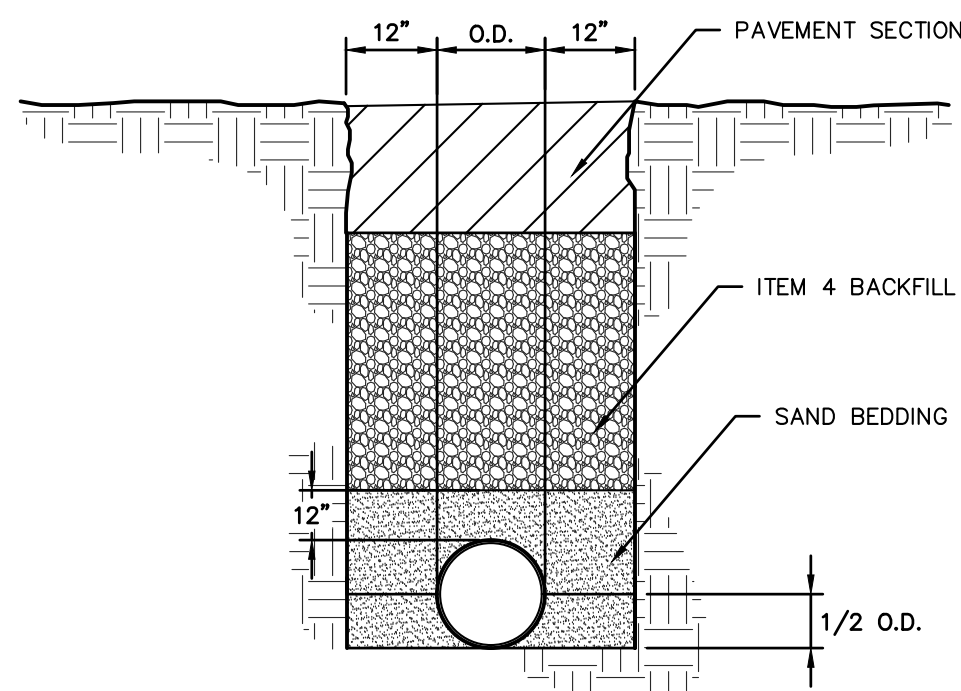

TRENCH BEDDING (PAVED AREAS)

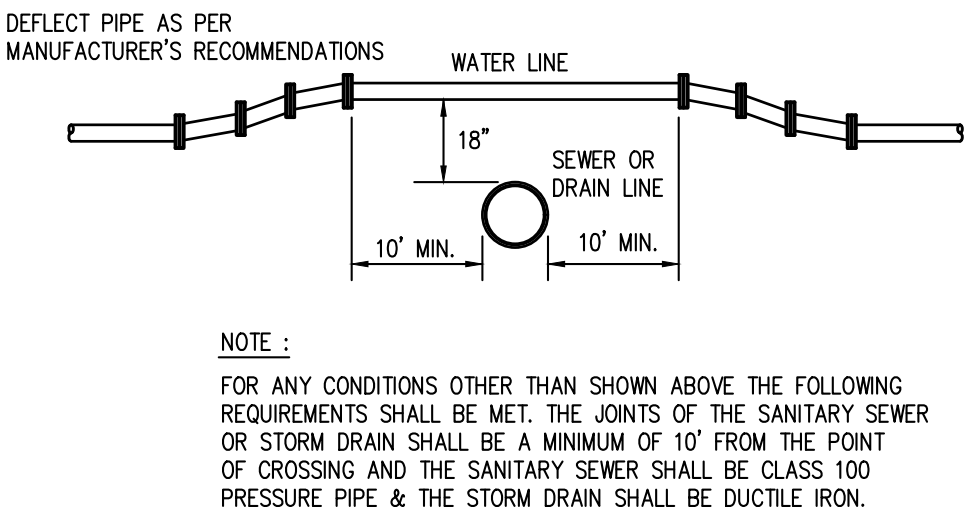


**CROSSING OF WATER LINE OVER
SANITARY SEWER OR STORM DRAIN**

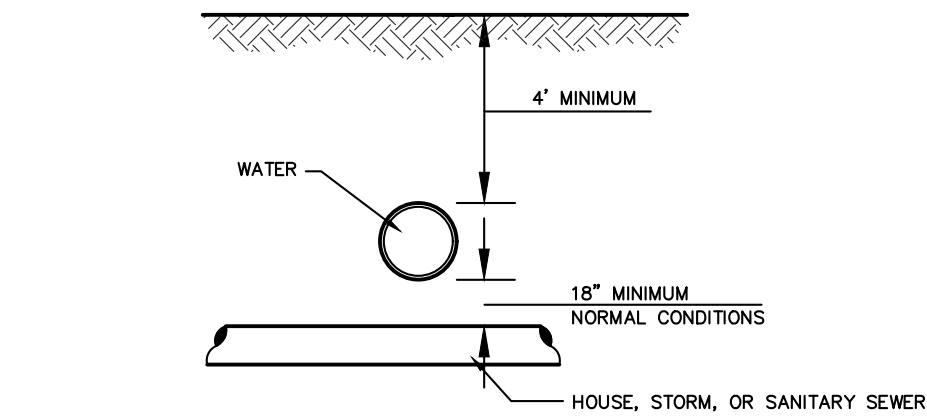


UNUSUAL CONDITIONS

WATER MAINS PASSING UNDER SEWERS SHALL HAVE A VERTICAL CLEARANCE OF 18" MIN. BETWEEN THE SEWER AND WATER MAIN AND THE SEWER SHALL BE SUPPORTED AS DIRECTED BY THE ENGINEER. TO THE EXTENT FEASIBLE, JOINTS IN THE WATER MAIN SHALL BE KEPT AS FAR AS POSSIBLE FROM THE SEWER. WHERE AN 18" SEPARATION CANNOT BE OBTAINED DUE TO FIELD CONDITIONS, SEPARATE APPROVAL OF THE WESTCHESTER COUNTY HEALTH DEPARTMENT SHALL BE REQUIRED.

**SEPARATION OF WATER MAINS AND
SEWER CROSSINGS**

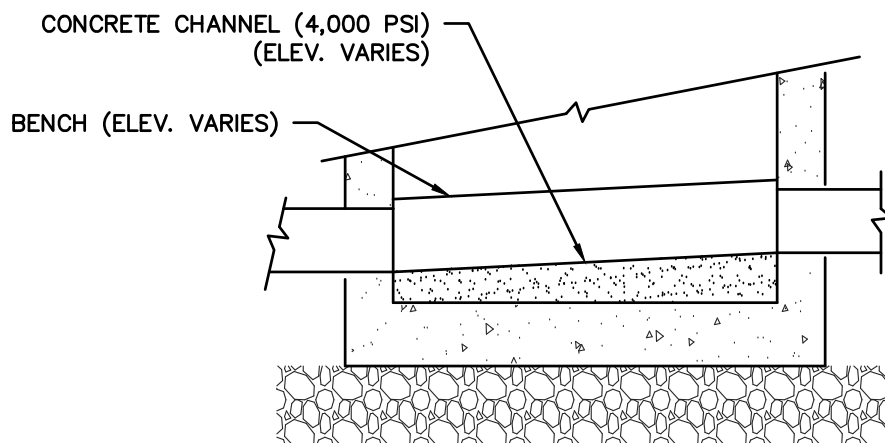


SECTION A-A'

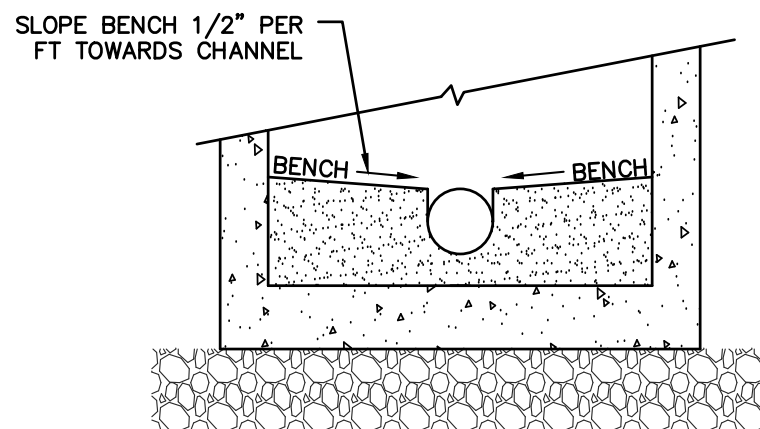


SECTION B-B'

- NOTES:**
1. SLOPE CHANNEL DOWN 0.10 FEET FROM INLET TO OUTLET.
 2. MAKE CHANGES IN FLOW DIRECTION BY CIRCULAR CHANNEL CONSTRUCTION WITH MAXIMUM RADIUS POSSIBLE.
 3. FOR DEAD-END MANHOLES, BUILD CHANNEL AS DIRECTED BY ENGINEER.


**FORMED INVERT CHANNEL
FOR SEWER MANHOLES**

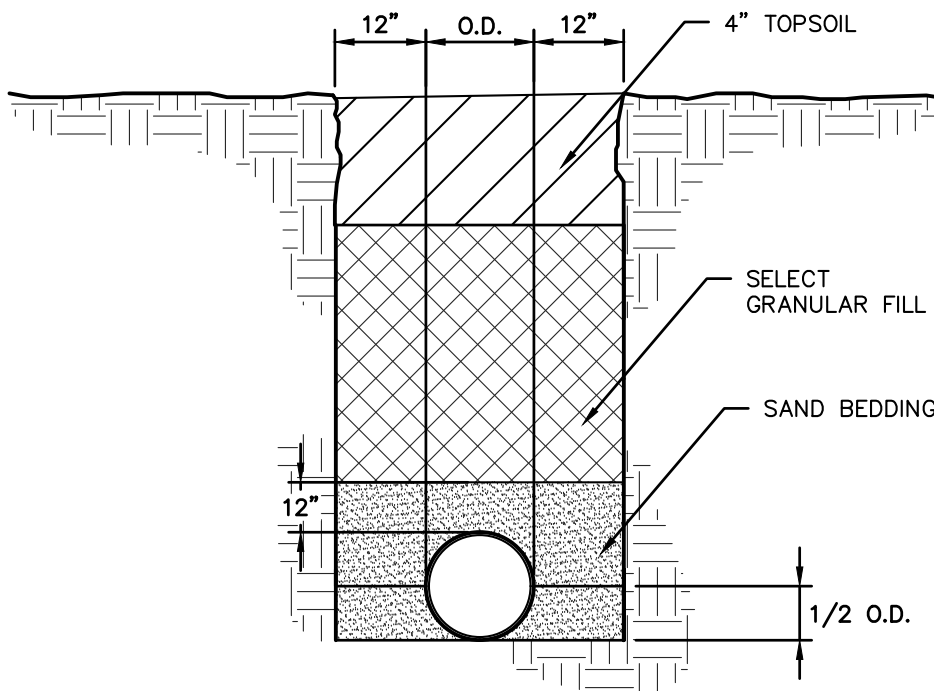



**TRENCH BEDDING
(NON-PAVED AREAS)**

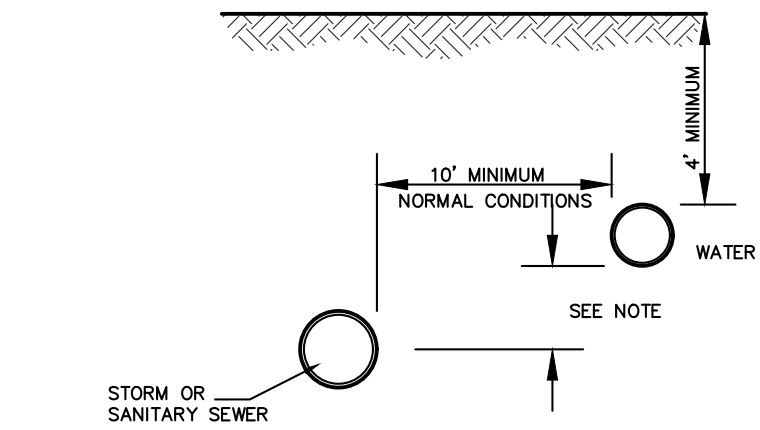

**SEPARATION OF WATER MAINS AND
SEWERS - PARALLEL INSTALLATION**

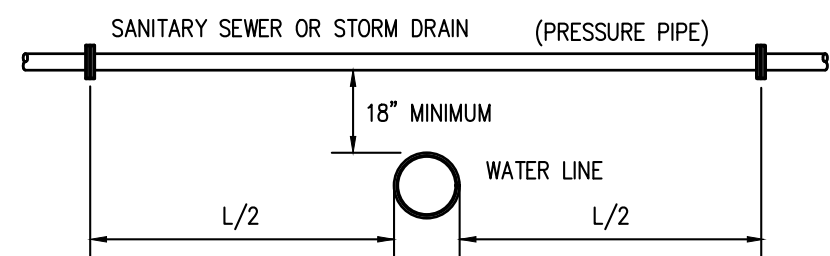


**CROSSING OF WATER LINE UNDER
SANITARY SEWER OR STORM DRAIN**

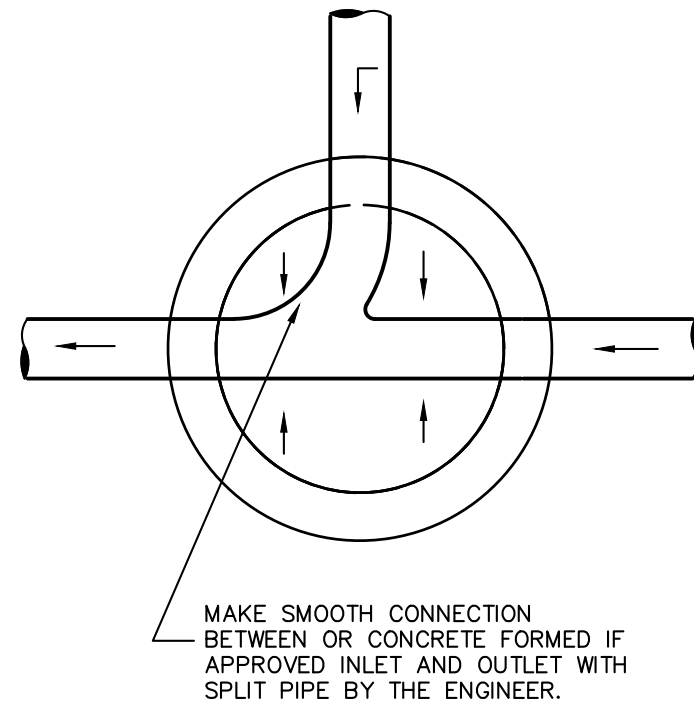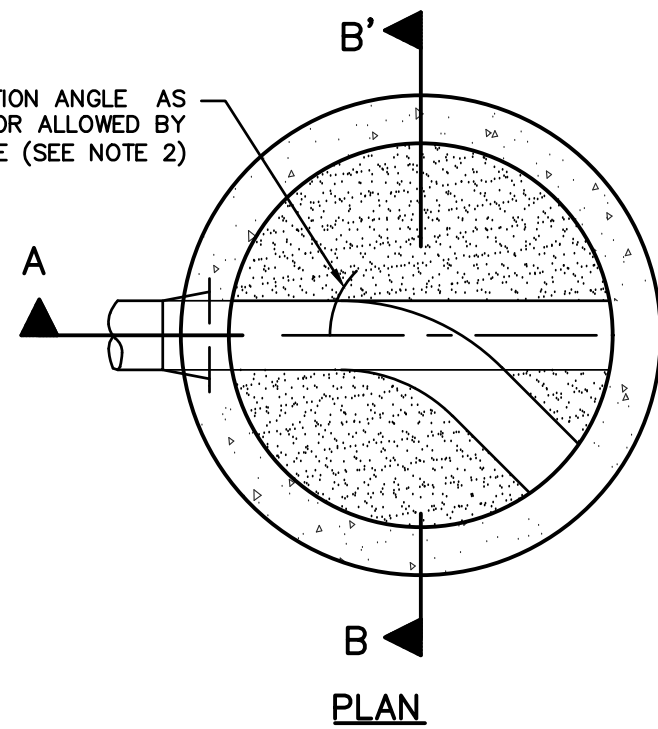


TYPICAL MANHOLE BASE



1. STEPS SHALL BE PLACED APPROXIMATELY 12" ON CENTER FOR THE FULL DEPTH OF THE MANHOLE. NO STEPS WILL BE REQUIRED IN MANHOLES LESS THAN 4' DEEP.
2. STEPS SHALL BE COPOLYMER POLYPROPYLENE WITH GRADE 60 STEEL REINFORCED ROD.
3. STEP SHALL BE MANUFACTURED WITH 3" STEEL IN ACCORDANCE WITH ASTM A615

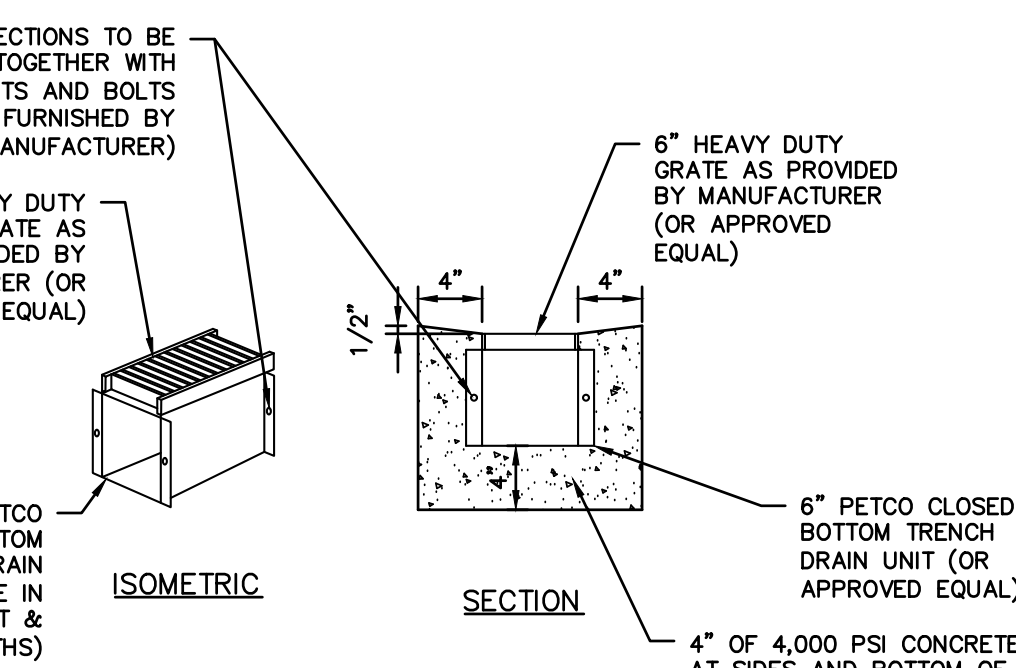

STEEL TRENCH DRAIN

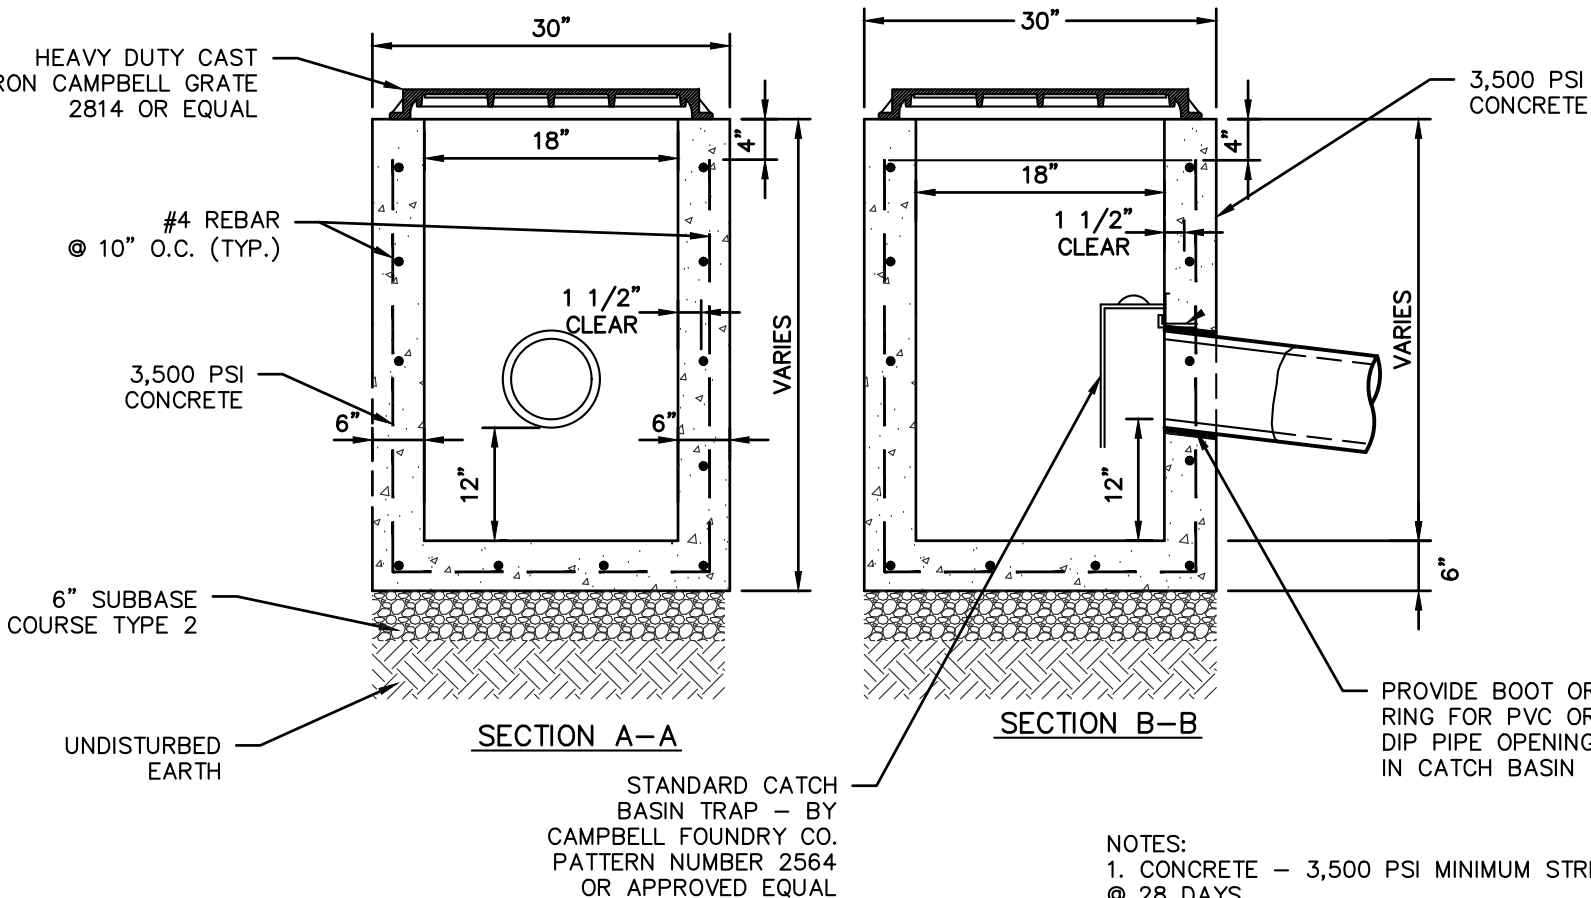

18" X18" PRECAST DRAIN INLET

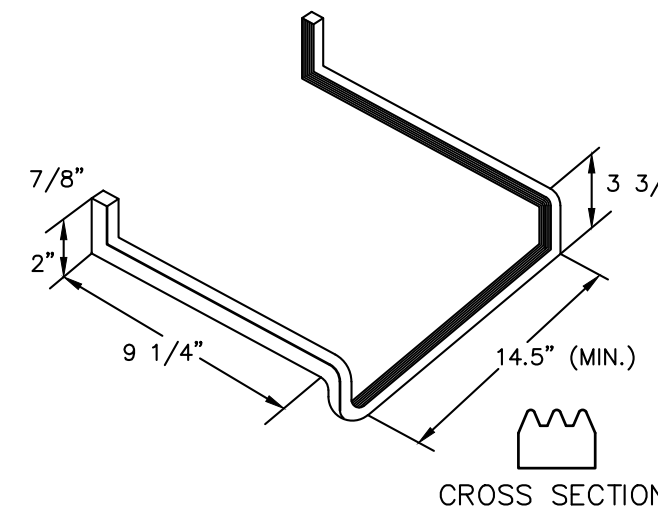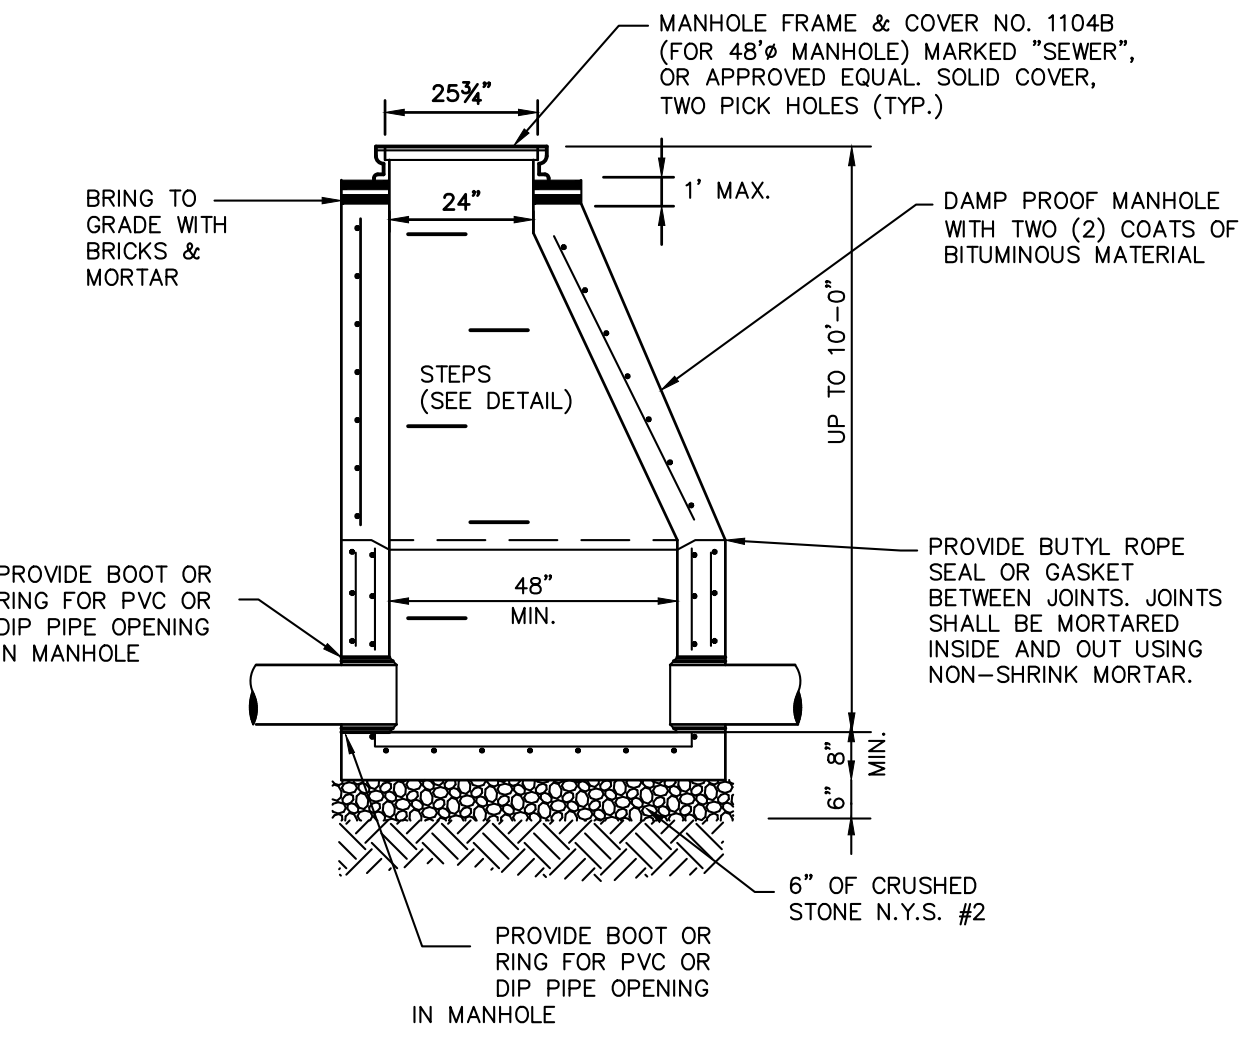

STEP DETAIL

**PRECAST CONCRETE
SANITARY MANHOLE**

DATE	2/24/26
REVISED PER TOWN COMMENTS	
DESIGNED BY	D.C.
CHECKED BY	M.S.
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8
PROJECT	PROPOSED 2-LOT SUBDIVISION 3138 HEARTHSTONE ROAD TOWN OF YORKTOWN WESTCHESTER COUNTY - NEW YORK
DETAILS	
HEC	HUDSON ENGINEERING CONSULTING, P.C. 45 Knollwood Road - Suite 201 Elmsford, New York 10523 T: 914-909-0420 F: 914-560-2086
EXPIRES: 05/31/26	
DATE	10/17/25
SCALE	AS NOTED
SHEET	8

TREE INVENTORY								
Tree ID	Common Name	Scientific Name	DBH	Specimen Tree? Y/N	Invasive Species? Y/N	Dead/ Diseased? Y/N	Tree to be Removed? Y/N	# Protected Tree Count 0/1
1	Norway Maple	Acer platanoides	12	N	Y	N	N	0
2	Norway Maple	Acer platanoides	16	N	Y	N	N	0
3	White Ash	Fraxinus americana	10	N	N	N	N	0
4	Norway Maple	Acer platanoides	16	N	Y	Y	N	0
5	Norway Maple	Acer platanoides	14	N	N	N	N	0
6	Norway Maple	Acer platanoides	8	N	Y	N	N	0
7	Norway Maple	Acer platanoides	8	N	Y	Y	N	0
8	Norway Maple	Acer platanoides	9	N	Y	Y	N	0
9	Norway Maple	Acer platanoides	12	N	Y	Y	N	0
10	Norway Maple	Acer platanoides	16	N	Y	N	N	0
11	White Ash	Fraxinus americana	14	N	N	Y	N	0
12	White Ash	Fraxinus americana	13	N	N	Y	N	0
13	Norway Maple	Acer platanoides	14	N	Y	Y	N	0
14	White Ash	Fraxinus americana	17	N	N	N	Y	1
15	Norway Maple	Acer platanoides	13	N	Y	N	Y	1
16	Norway Maple	Acer platanoides	12	N	Y	N	Y	1
17	White Ash	Fraxinus americana	8	N	N	Y	Y	1
18	White Ash	Fraxinus americana	8	N	N	N	Y	1
19	Red Maple	Acer rubrum	26	Y	N	Y	Y	1
20	Norway Maple	Acer platanoides	10	N	Y	N	Y	1
21	White Ash	Fraxinus americana	11	N	N	Y	Y	1
22	Norway Maple	Acer platanoides	8	N	Y	N	Y	1
23	Norway Maple	Acer platanoides	10	N	Y	N	Y	1
24	Red Maple	Acer rubrum	28	Y	N	Y	Y	1
25	Silver Maple	Acer saccharinum	18	N	N	Y	Y	1
26	Silver Maple	Acer saccharinum	14	N	N	N	Y	1
27	Black Cherry	Prunus serotina	12	N	N	Y	N	0
28	White Ash	Fraxinus americana	14	N	N	N	N	0
29	Pig Nut Hickory	Carya glabra	18	N	N	N	N	0
30	Norway Maple	Acer platanoides	13	N	Y	N	Y	1
31	Norway Maple	Acer platanoides	10	N	Y	Y	Y	1
32	Black Oak	Quercus velutina	20	N	N	N	N	0
33	Norway Maple	Acer platanoides	8	N	Y	N	Y	1
34	Norway Maple	Acer platanoides	24	Y	Y	Y	N	0
35	Silver Maple	Acer saccharinum	12	N	N	N	Y	1
36	Sweet Cherry	Prunus avium	8	N	N	N	Y	1
37	Sweet Cherry	Prunus avium	24	Y	N	Y	N	0
38	Sweet Cherry	Prunus avium	12	N	N	N	Y	1
39	Silver Maple	Acer saccharinum	25	N	N	Y	Y	1
40	Norway Maple	Acer platanoides	20	N	Y	N	Y	1
41	Mulberry	Morus alba	8	N	Y	Y	Y	1
42	Tulip	Liriodendron	32	Y	N	N	Y	1
43	Norway Maple	Acer platanoides	24	N	N	N	Y	1
44	American Beech	Fagus grandifolia	8	N	N	Y	Y	1
45	Red Maple	Acer rubrum	24	N	N	N	Y	1
46	Sugar Maple	Acer saccharum	8	N	N	N	Y	1
47	Red Maple	Acer rubrum	10	N	N	N	Y	1
48	Silver Maple	Acer saccharinum	18	N	N	N	N	0
49	Red Maple	Acer rubrum	16	N	N	Y	N	0
50	Silver Maple	Acer saccharinum	19	N	N	Y	Y	1
51	Red Maple	Acer rubrum	23	N	N	N	Y	1
52	Norway Maple	Acer platanoides	8	N	Y	N	Y	1
53	Norway Maple	Acer platanoides	10	N	Y	N	N	0
54	White Ash	Fraxinus americana	8	N	N	Y	N	0
55	Black Cherry	Prunus serotina	12	N	N	N	N	0
56	Red Maple	Acer rubrum	14	N	N	N	Y	1
57	Red Maple	Acer rubrum	20	N	N	N	Y	1
58	Sugar Maple	Acer saccharum	9	N	N	N	Y	1
59	Red Maple	Acer rubrum	8	N	N	Y	Y	1
60	Red Maple	Acer rubrum	13	N	N	Y	Y	1
61	Red Maple	Acer rubrum	12	N	N	N	Y	1
62	Red Maple	Acer rubrum	8	N	N	N	Y	1
63	Red Maple	Acer rubrum	12	N	N	Y	Y	1
64	Red Maple	Acer rubrum	12	N	N	Y	Y	1
65	Red Maple	Acer rubrum	24	N	N	N	Y	1
66	Black Cherry	Prunus serotina	16	N	N	Y	Y	1
67	Red Maple	Acer rubrum	24	N	N	N	Y	1
68	Red Maple	Acer rubrum	14	N	N	N	Y	1
69	Red Maple	Acer rubrum	19	N	N	N	N	0
70	Red Maple	Acer rubrum	12	N	N	N	N	0
71	Red Maple	Acer rubrum	14	N	N	Y	N	0
72	Red Maple	Acer rubrum	16	N	N	N	N	0
73	White Ash	Fraxinus americana	12	N	N	Y	N	0
74	Red Maple	Acer rubrum	10	N	N	N	N	0
75	Red Maple	Acer rubrum	8	N	N	N	N	0
76	Red maple	Acer rubrum	8	N	N	Y	N	0
77	American Beech	Fagus grandifolia	10	N	N	Y	N	0
Total # of Trees Surveyed:			77	Total Protected Trees to be Removed:			44	

